


## PATH TO THE FUTURE

Introducing the MSI MAG 274CQF esports gaming monitor. This cutting-edge monitor features a 27-inch WQHD display with a lightning-fast 180Hz refresh rate and a rapid 0.5ms (GtG, Min.) response time. With the MAG 274CQF, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.

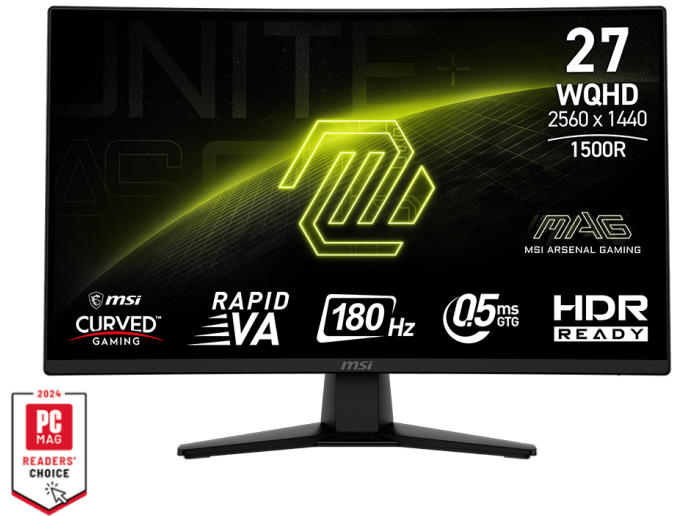

Picture and logos

## SELLING POINTS

- Panel Rapid VA - oferuje szybki, 0,5-milisekundowy czas reakcji (GtG, min.) matrycy, optymalizuje kolory i jasność ekranu.
- Częstotliwość odświeżania 180 Hz - Reaguj znacznie szybciej dzięki dużo bardziej płynnemu wyświetlaniu klatek obrazu na ekranie monitora.
- 0,5-milisekundowy czas reakcji (GtG, min.) matrycy - Zlikwidowany efekt rozdierania ekranu i wyeliminowana niestabilność szybkości generowania klatek obrazu.
- AI Vision - Nowa technologia AI Vision może nie tylko ujawnić szczegóły ukrywające się w ciemnych obszarach ekranu, ale także zwiększyć ogólną jasność i nasycenie kolorów.
- Technologia Less Blue Light - Zastosuj software'owe rozwiązanie, które zmniejszy emisję niebiesko-fioletowego światła w obszarze niebieskiego widma.



1. 5-way Joystick Navigator
2. DC-in
3. Display Port 1.4a
4. 2x HDMI™ 2.0b(WQHD@144Hz)
5. Earphone out
6. Kensington Lock

## SPECIFICATION

Model	SKU Number	0
	Part No	9S6-3CE31T-007
	Color	ID1/Black-Black
Display	Screen Size	27" (69 cm)
	Active Display Area (mm)	596.736(H) x 335.664(V)
	Curvature	Curve 1500R
	Panel Type	Rapid VA
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~180Hz (V)
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	5000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	TBD
	Refresh Rate	180Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	0.5ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	TBD
	NTSC (CIE1931 area percentage/overlap)	TBD
	sRGB (CIE1976 area percentage/overlap)	TBD
	sRGB (CIE1931 area percentage/overlap)	TBD
	Adobe RGB (CIE1976 area percentage/overlap)	TBD
	Adobe RGB (CIE1931 area percentage/overlap)	TBD
	DCI-P3 (CIE1976 area percentage/overlap)	TBD
	DCI-P3 (CIE1931 area percentage/overlap)	TBD
	Rec.709 (CIE1976 area percentage/overlap)	TBD
	Rec.709 (CIE1931 area percentage/overlap)	TBD
	Rec.2020 (CIE1976 area percentage/overlap)	TBD
	Rec.2020 (CIE1931 area percentage/overlap)	TBD
Surface Treatment	Anti-glare	
Display Colors	16.7M	
Color bit	8 bits	
I/O Ports	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	External Adaptor 20V 2.25A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	N/A
Power Cord Type	C5	

Accessories	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	TBD x TBD x TBD
	Product Dimension without Stand (WxDxH) (mm)	TBD x TBD x TBD
	Stand Dimension (WxDxH) (mm)	TBD x TBD x TBD
	Weight (Net kg)	TBD
	Weight Without Stand (kg)	TBD
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	N/A
	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	TBD
Barcode Info	EAN	4711377235143