


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Panel Rapid VA - oferuje szybki, 0,5-milisekundowy czas reakcji (GtG, min.) matrycy, optymalizuje kolory i jasność ekranu.
- Częstotliwość odświeżania 200 Hz - reaguj znacznie szybciej dzięki dużo bardziej płynnemu wyświetlaniu klatek obrazu na ekranie monitora.
- 0,5-milisekundowy czas reakcji (GtG, min.) matrycy - zlikwidowany efekt rozdzierania ekranu i wyeliminowana niestabilność szybkości generowania klatek obrazu.
- AI Vision - nowa technologia AI Vision może nie tylko ujawnić szczegóły ukrywające się w ciemnych obszarach ekranu, ale także zwiększyć ogólną jasność i nasycenie kolorów.
- Technologia Less Blue Light - zastosuj software'owe rozwiązanie, które zmniejszy emisję niebiesko-fioletowego światła w obszarze niebieskiego widma.

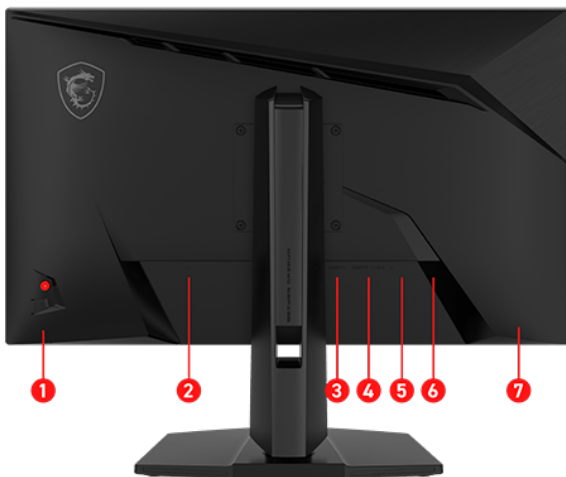

1. 5-way Joystick Navigator
2. AC-in
3. Display Port 1.4a(HBR3)
4. 2 x HDMI™ 2.0b (WQHD@144Hz)
5. Type-C (DP alt.) w/ 15W PD
6. Headphone out
7. Kensington Lock

SPECIFICATION

Model	Part No	9S6-3CF69T-001
	Color	ID1/Black-Black
	Local Dimming	4 Zones
Display	Screen Size	27" (68.58 cm)
	Active Display Area (mm)	596.736(H) x 335.664(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~200Hz
	HDR (High dynamic range)	VESA DisplayHDR 400
	SDR Brightness (nits)	300
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	72~300 KHz(H) /48~200 Hz(V)
	Refresh Rate	200HZ
	Response Time (GTG)	0.5ms (Min.)
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	TBD
	NTSC (CIE1931 area percentage/overlap)	TBD
	sRGB (CIE1976 area percentage/overlap)	TBD
	sRGB (CIE1931 area percentage/overlap)	TBD
	Adobe RGB (CIE1976 area percentage/overlap)	TBD
	Adobe RGB (CIE1931 area percentage/overlap)	TBD
	DCI-P3 (CIE1976 area percentage/overlap)	TBD
	DCI-P3 (CIE1931 area percentage/overlap)	TBD
	Rec.709 (CIE1976 area percentage/overlap)	TBD
	Rec.709 (CIE1931 area percentage/overlap)	TBD
	Rec.2020 (CIE1976 area percentage/overlap)	TBD
	Rec.2020 (CIE1931 area percentage/overlap)	TBD
	Surface Treatment	Anti-glare
	Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)	
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a (HBR3)
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Annual Energy Consumption (KWh)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	TBD
Power Cord Type	C13	

Accessories	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	TBD x TBD x TBD
	Product Dimension without Stand (WxDxH) (mm)	TBD x TBD x TBD
	Stand Dimension (WxDxH) (mm)	TBD x TBD x TBD
	Weight (Net kg)	TBD
	Weight Without Stand (kg)	TBD
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	84 x 14.8 x 47.5
	Outer Carton Dimension (WxDxH) (cm)	85.5 x 16.3 x 49.8
	Weight (Gross kg)	TBD
Barcode Info	EAN	4711377368131