

### PATH TO THE FUTURE


The MSI MPG 341CQR QD-OLED X36 Gaming Monitor, 34 inches of stunning QD-OLED, 3440x1440 (UWQHD) and 360Hz for ultra-smooth visuals. Perfect for competitive gamers seeking immersion. Upgrade your setup—check out now and game on!



Picture and logos

### SELLING POINTS

- Najnowszy panel QD-OLED piątej generacji – nowy układ subpikseli, RGB Stripe, oferuje dużo ostrzejszy obraz.
- Powłoka DarkArmor – zapewnia o 40% głębszą czerń i 2,5-krotnie większą odporność powierzchni ekranu na zarysowania.
- Jednolita luminancja – funkcja HDR Curve Customization pozwala na dostosowanie krzywej HDR i cieszenie się doskonałym, jednolitym obrazem o szerokim zakresie dynamiki.
- System MSI OLED Care 3.0 – czujnik AI Care zmniejszył ryzyko wystąpienia efektu utrwalenia się obrazu / wypalenia ekranu OLED.
- Niewiarygodne wizualizacje HDR – certyfikat VESA DisplayHDR True Black 500.
- Jasność szczytowa 1300 nitów – zapewnia doskonałe wrażenia HDR dzięki jasności szczytowej wynoszącej 1300 nitów.
- Zagwarantowano, że współczynnik różnicy wartości koloru dla odwzorowania wyświetlanych na ekranie barw jest mniejszy od dwóch – Delta E≤2.
- Krystalicznie czysty ruch – certyfikat VESA ClearMR 18000.
- 3-letnia gwarancja obejmująca wypalenie – w tym dotyczy efektu utrwalenia / wypalania się obrazu OLED.

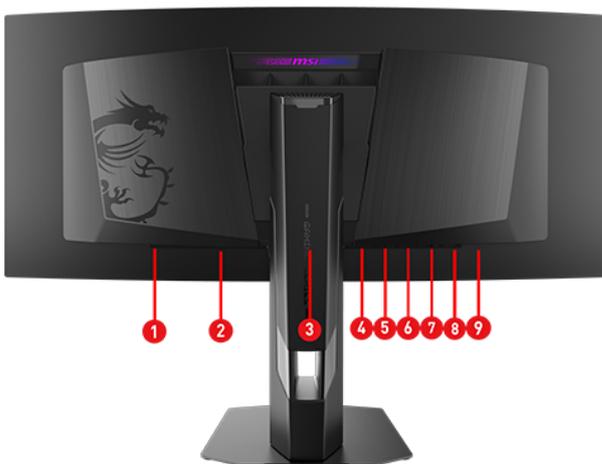

1. Kensington Lock
2. AC-in
3. 5-way Joystick Navigator
4. Headphone-out
5. 2x HDMI™ 2.1 (UWQHD@360Hz)
6. DisplayPort 2.1a (UHBR13.5)
7. Type-C (DP alt.) w/ 98W PD
8. USB 2.0 Type-B
9. 2x USB 2.0 Type-A

**SPECIFICATION**

|                 |   |                                |
|-----------------|---|--------------------------------|
| Model           | Part No                                     | 9S6-3DE29A-001                 |
|                 | Color                                       | ID1/Black-Black                |
| Display         | Screen Size                                 | 34" (86.36 cm)                 |
|                 | Active Display Area (mm)                    | 800.06(H) x 337.06(V)          |
|                 | Curvature                                   | Curve 1800R                    |
|                 | Panel Type                                  | QD-OLED                        |
|                 | Resolution                                  | 3440x1440 (UWQHD)              |
|                 | Pixel pitch (mm)                            | 0.2315(H)x0.2315(V)            |
|                 | Aspect Ratio                                | 21:9                           |
|                 | Dynamic Refresh Rate technology             | Adaptive-Sync                  |
|                 | Dynamic Refresh Rate Activated Range        | 48~360Hz                       |
|                 | HDR (High dynamic range)                    | VESA DisplayHDR True Black 500 |
|                 | SDR Brightness (nits)                       | 300                            |
|                 | HDR Brightness (Peak nits)                  | TBD                            |
|                 | Contrast Ratio                              | 1500000:1                      |
|                 | Signal Frequency                            | TBD                            |
|                 | Refresh Rate                                | 360Hz                          |
|                 | Response Time (GTG)                         | 0.03ms                         |
|                 | View Angles                                 | 178°(H)/178°(V)                |
|                 | NTSC (CIE1976 area percentage/overlap)      | 121.3%/94.2%                   |
|                 | NTSC (CIE1931 area percentage/overlap)      | 105.4%/92.3%                   |
|                 | sRGB (CIE1976 area percentage/overlap)      | 139.1%/100%                    |
|                 | sRGB (CIE1931 area percentage/overlap)      | 148.8%/100%                    |
|                 | Adobe RGB (CIE1976 area percentage/overlap) | 119.2%/97.8%                   |
|                 | Adobe RGB (CIE1931 area percentage/overlap) | 109.7%/99.1%                   |
|                 | DCI-P3 (CIE1976 area percentage/overlap)    | 110.8%/99.3%                   |
|                 | DCI-P3 (CIE1931 area percentage/overlap)    | 109.7%/99.1%                   |
|                 | Rec.709 (CIE1976 area percentage/overlap)   | 139.1%/100%                    |
|                 | Rec.709 (CIE1931 area percentage/overlap)   | 148.8%/100%                    |
|                 | Rec.2020 (CIE1976 area percentage/overlap)  | 80.7%/80.7%                    |
|                 | Rec.2020 (CIE1931 area percentage/overlap)  | 78.7%/78.7%                    |
|                 | Surface Treatment                           | Anti-Reflection                |
|                 | Display Colors                              | 1.07B                          |
|                 | Color bit                                   | 10 bits                        |
| I/O Ports       | USB Type C (DisplayPort Alternate)          | 1                              |
|                 | Headphone-out                               | 1                              |
|                 | USB 2.0 Type A                              | 2                              |
|                 | USB 2.0 Type B                              | 1                              |
|                 | Lock type                                   | Kensington Lock                |
|                 | HDMI  | 2                              |
|                 | HDMI version                                | 2.1                            |
|                 | HDMI HDCP version                           | 2.3                            |
|                 | DisplayPort                                 | 1                              |
|                 | DisplayPort version                         | 2.1a (UHBR13.5)                |
|                 | DisplayPort HDCP version                    | 2.3                            |
| Warranty        | Warranty                                    | 36M                            |
| Power           | Power Type                                  | Internal Power Board           |
|                 | Power Input                                 | 100~240V, 50/60Hz              |
|                 | On-mode Power Consumption (KWh/1000h)       | TBD                            |
|                 | Annual Energy Consumption (KWh)             | TBD                            |
|                 | Standby-mode Power Consumption (W)          | 0.5                            |
|                 | Off-mode Power Consumption (W)              | 0.3                            |
|                 | Energy Efficiency Rating                    | TBD                            |
| Power Cord Type | C13   |                                |

|                              |  |               |
|------------------------------|--|---------------|
| Accessories                  | DisplayPort Cable                            | 1             |
|                              | HDMI Cable                                   | 1             |
|                              | DVI Cable                                    | 0             |
|                              | USB Type A to Type B Cable                   | 1             |
|                              | USB Type C to Type A Cable                   | 0             |
|                              | USB Type C to Type C Cable                   | 0             |
|                              | Thunderbolt Cable                            | 0             |
|                              | VGA Cable                                    | 0             |
|                              | 3.5mm audio Cable                            | 0             |
|                              | 3.5mm combo audio Cable                      | 0             |
|                              | 3.5mm Mic Cable                              | 0             |
|                              | Power Cord                                   | 1             |
|                              | AC Adaptor                                   | 0             |
|                              | Quick Guide                                  | 1             |
|                              | Warranty Card                                | 0             |
| Mouse Bungee Unit            | 0  |               |
| Design                       | Adjustment (Tilt)                            | -5° ~ 15°     |
|                              | Adjustment (Swivel)                          | -30° ~ 30°    |
|                              | Adjustment (Height)                          | 0 ~ 110 mm    |
|                              | Adjustment (Pivot)                           | -10° ~ 10°    |
|                              | VESA Mounting                                | 100x100mm     |
| Dimension & Weight (product) | Product Dimension with Stand (WxDxH) (mm)    | N/A           |
|                              | Product Dimension without Stand (WxDxH) (mm) | N/A           |
|                              | Stand Dimension (WxDxH) (mm)                 | N/A           |
|                              | Weight (Net kg)                              | N/A           |
|                              | Weight Without Stand (kg)                    | N/A           |
| Dimension & Weight (box)     | Inside Carton Dimension (WxDxH) (cm)         | N/A           |
|                              | Outer Carton Dimension (WxDxH) (cm)          | N/A           |
|                              | Weight (Gross kg)                            | N/A           |
| Barcode Info                 | EAN  | 4711377404099 |