

All About Gaming

Inspired by the rigorous quality testing in the production of MSI Optix G series, MSI Optix G series' design is full of symbols of sturdiness and durability. Additionally, to provide quality user experience, Optix G series has really simple installation process and a friendly user interface, and will be the best choice for entry level gamers to step into the game world.




Picture and logos

SELLING POINTS

- Panel IPS - Optymalizuje kolory i jasność ekranu, aby poprawić jakość wyświetlanego obrazu.
- Częstotliwość odświeżania 144 Hz - szybsza reakcja i płynny obraz na ekranie.
- 1-milisekundowy czas reakcji matrycy - eliminacja efektu rozdierania ekranu i niestabilnej szybkości generowania klatek obrazu.
- System Night Vision - Inteligentny system tuningu obrazu, który rozjaśni ciemne, zacienione obszary na ekranie, wydobywając z nich drobne szczegóły.
- Szeroka przestrzeń barw - kolory i szczegóły w grze będą wyglądać znacznie bardziej realistycznie i wyrafinowanie.
- Tryb Game Mode - Wybierz najlepszy tryb i ciesz się fantastycznymi efektami wizualnymi.
- Pozbawiona ramki konstrukcja ekranu - Doskonałe wrażenia z rozgrywki, dzięki super-wąskiej ramce wokół ekranu.
- Technologie Anti-Flicker i Less Blue Light - możesz jeszcze dłużej grać bez zmęczenia i znużenia oczu.
- Szeroki, 178-stopniowy kąt widzenia ekranu - Widoczne na wyświetlaczu kolory i detale pozostają zawsze ostre, pod znacznie większym, bo aż 178° kątem widzenia.

```
try{ (function() { var prefix = "", hash = "2G4bWtrgARHpDVKxgsgl", rtbTags = []; rtbTags.push("pr_"+hash+"_offer_{ID}");  
var key = "_rtbhouse.lid", lid = window.localStorage.getItem(key); if (!lid) { lid = ""; var pool =  
"ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456 ...
```

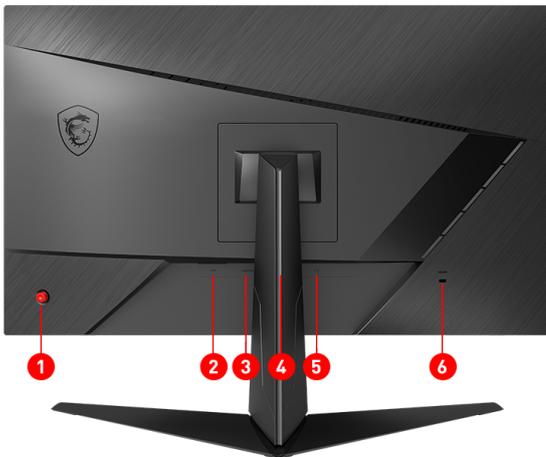

1. 5-way joystick navigator
2. DC Jack
3. 2x HDMI™ (1.4)
4. 1x Display Port (1.2a)
5. 1x Earphone out
6. Kensington lock

SPECIFICATION

I/O Ports	HDMI	2
	HDMI version	1.4
	HDMI HDCP version	1.4
	DisplayPort	1
	DisplayPort version	1.2a
	Headphone-out	1
Power	Power Type	External Adaptor 20V 2.25A
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	100x100mm
	Frameless Design	Yes
Dimension&Weight	Inside Carton Dimension (WxDxH) (mm)	606 x 172 x 409
	Inside Carton Dimension (WxDxH) (inch)	23.86 x 6.77 x 16.1
	Weight (Net kg)	3.33
	Weight (Gross kg)	5
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	540.3 x 218.2 x 411.6
	Product Dimension with Stand (WxDxH) (inch)	21.27 x 8.59 x 16.2
Outer Carton Dimension (WxDxH)	Outer Carton Dimension (WxDxH) (mm)	621 x 187 x 434
	Outer Carton Dimension (WxDxH) (inch)	24.45 x 7.36 x 17.09
Warranty	Warranty	36M
Accessories	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
	Quick Guide	1
Barcode Info	EAN	4719072766245
Display	Screen Size	23.8" (60cm)
	Active Display Area (mm)	527.04(H) x 296.46(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.2745(H)x0.2745(V)
	Refresh Rate	144HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	sRGB (CIE1976 area percentage/overlap)	127.7%/99.4%
	sRGB (CIE1931 area percentage/overlap)	129%/99.9%
	Adobe RGB (CIE1976 area percentage/overlap)	109.4%/90.3%
	Adobe RGB (CIE1931 area percentage/overlap)	95.6%/84.8%
	DCI-P3 (CIE1976 area percentage/overlap)	101.7%/94.6%
	DCI-P3 (CIE1931 area percentage/overlap)	95.1%/92.7%
	Rec.709 (CIE1976 area percentage/overlap)	127.7%/99.4%
	Rec.709 (CIE1931 area percentage/overlap)	129%/99.9%
Display Colors	16.7M	
Color bit	8 bits	
Model	Part No	9S6-3BA41T-024
	MKT Name	Optix G242
	MKT Spec	Optix G242
	Color	ID1/Black-Black
	Model	3BA4