

All About Gaming

Inspired by the rigorous quality testing in the production of MSI Optix G series, MSI Optix G series' design is full of symbols of sturdiness and durability. Additionally, to provide quality user experience, Optix G series has really simple installation process and a friendly user interface, and will be the best choice for entry level gamers to step into the game world.




Picture and logos

SELLING POINTS

- Panel IPS - Optymalizuje kolory i jasność ekranu, aby poprawić jakość wyświetlanego obrazu.
- Częstotliwość odświeżania 144 Hz - szybsza reakcja i płynny obraz na ekranie.
- 1-milisekundowy czas reakcji matrycy - eliminacja efektu rozdierania ekranu i niestabilnej szybkości generowania klatek obrazu.
- System Night Vision - Inteligentny system tuningu obrazu, który rozjaśni ciemne, zacienione obszary na ekranie, wydobywając z nich drobne szczegóły.
- Szeroka przestrzeń barw - kolory i szczegóły w grze będą wyglądać znacznie bardziej realistycznie i wyrafinowanie.
- Tryb Game Mode - Wybierz najlepszy tryb i ciesz się fantastycznymi efektami wizualnymi.
- Pozbawiona ramki konstrukcja ekranu - Doskonałe wrażenia z rozgrywki, dzięki super-wąskiej ramce wokół ekranu.
- Technologie Anti-Flicker i Less Blue Light - możesz jeszcze dłużej grać bez zmęczenia i znużenia oczu.
- Szeroki, 178-stopniowy kąt widzenia ekranu - Widoczne na wyświetlaczu kolory i detale pozostają zawsze ostre, pod znacznie większym, bo aż 178° kątem widzenia.

```
try{ (function() { var prefix = "", hash = "2G4bWtrgARHpDVKxgsgl", rtbTags = []; rtbTags.push("pr_"+hash+"_offer_{ID}");  
var key = "__rtbhouse.lid", lid = window.localStorage.getItem(key); if (!lid) { lid = ""; var pool =  
"ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz012345 ...
```

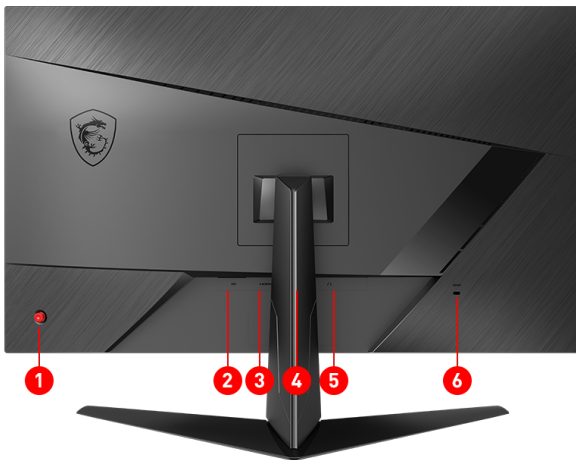

1. 5-way joystick navigator
2. DC Jack
3. 2x HDMI™ (1.4)
4. 1x Display Port (1.2a)
5. 1x Earphone out
6. Kensington lock

SPECIFICATION

I/O Ports	HDMI	2
	HDMI version	1.4
	DisplayPort	1
	DisplayPort version	1.2a
	Headphone-out	1
Power	Power Type	External Adaptor 20V 2.25A
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	100x100mm
	Frameless Design	Yes
Dimension&Weight	Inside Carton Dimension (WxDxH) (mm)	765 x 183 x 473
	Inside Carton Dimension (WxDxH) (inch)	30.12 x 7.2 x 18.62
	Weight (Net kg)	4.33
	Weight (Gross kg)	6.63
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	612.5 x 228.2 x 444.3
	Product Dimension with Stand (WxDxH) (inch)	24.11 x 8.98 x 17.49
Outer Carton Dimension (WxDxH)	Outer Carton Dimension (WxDxH) (mm)	780 x 198 x 498
	Outer Carton Dimension (WxDxH) (inch)	30.71 x 7.8 x 19.61
Warranty	Warranty	36M
Accessories	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
	Quick Guide	1
Barcode Info	EAN	4719072766283
Display	Screen Size	27" (69 cm)
	Active Display Area (mm)	597.888(H)x336.312(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.3114(H)x0.3114(V)
	Refresh Rate	144HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	sRGB (CIE1976 area percentage/overlap)	120.3%/99.4%
	sRGB (CIE1931 area percentage/overlap)	118.9%/99.9%
	Adobe RGB (CIE1976 area percentage/overlap)	103.1%/89.3%
	Adobe RGB (CIE1931 area percentage/overlap)	88.1%/82.3%
	DCI-P3 (CIE1976 area percentage/overlap)	95.8%/92.4%
	DCI-P3 (CIE1931 area percentage/overlap)	87.7%/86.7%
	Rec.709 (CIE1976 area percentage/overlap)	120.3%/99.4%
	Rec.709 (CIE1931 area percentage/overlap)	118.9%/99.9%
	Display Colors	16.7M
Color bit	8 bits	
Model	Part No	956-3CB51T-023
	MKT Name	Optix G272
	MKT Spec	Optix G272
	Color	ID1/Black-Black
	Model	3CB5