


Окно в большой мир



Picture and logos

SELLING POINTS

- Windows 11 Домашняя - MSI рекомендует Windows 11 Pro для бизнеса
- 27" дисплей IPS-класса с широкими углами обзора 178°, со светодиодной подсветкой и разрешением Full-HD (1920x1080 пикселей)
- Процессор до Intel® Core™ i7-12700 Alder Lake и память DDR5
- Экран с частотой обновления 100Гц и технологиями защиты зрения MSI Anti-Flicker и Less Blue Light
- Регулируемая подставка с удобным креплением, не требующим использования инструментов
- Видеовыходы HDMI™ и DP для двух внешних дисплеев
- Встроенная FHD-камера с поддержкой аутентификации Windows Hello
- Программное обеспечение Tobii Aware для защиты конфиденциальности
- Приложение MSI Cloud Center позволяет организовать частное облачное хранилище для файлов с мобильных устройств (под управлением Android или iOS)
- Дискретный модуль dTPM для защиты конфиденциальных данных
- Аудиотехнологии DTS для улучшения качества звука
- Надежность в работе 24/7
- DataSheet: Общие Характеристики серии PRO AP272P 12MA (pdf)

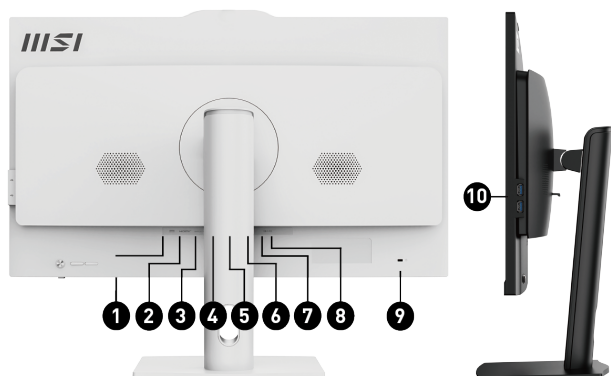

1. 1 x DC джек
2. 1 x HDMI™ out (2.1)
3. 1 x DisplayPort out (1.4)
4. 1 x RJ-45 Ethernet
5. 1 x USB 3.2 Gen 2 Type C / 1 x USB 3.2 Gen 2 Type A
6. 2 x USB 2.0 Type A
7. 1 x Mic-in
8. 1 x Line-out
9. 1 x слот замка Кенсингтона
10. 2 x USB 3.2 Gen 1 Type A



МОНОБЛОКИ

PRO AP272P 12MA

PRO AP272P 12MA-830XRU

SPECIFICATION

Operating Systems	Operating Systems	N/A
Model	Part No	9S6-AF8322-830
	MKT Name	PRO AP272P 12MA
	MKT Spec	PRO AP272P 12MA-830XRU
	Color	ID1/White-White-White
Chipset	Chipsets	H610
Memory	Memory Size	16GB(8GB*2)
	Memory Type	DDR5 SDRAM
	Memory Speed	2800(5600)MHz
	Module Type	SO-DIMM
	Memory Slot(Total)	2
	Memory Slot(Free)	0
	Max Capacity	Max 64GB
Processor	CPU Number	Intel Core i3-12100
	CPU Clock	3.3GHz
	CPU Cores	4
	TDP	60W
	Max Turbo Frequency	up to 4.30 GHz
	Cache	12 MB Intel® Smart Cache
	Threads	8
Display	View Angles	178°(H)/178°(V)
	Surface Treatment	Anti-Glare
	Touch Screen	Non-touch
	Screen Size	27" (69 cm)
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Brightness (nits)	250
	Contrast Ratio	1000:1
	Refresh Rate	N/A
Discrete Graphics	GPU1 Vendor	N/A
	GPU1 MKT Name	N/A
	GPU1 Number	UMA
	GPU1 VRAM Size	N/A
	GPU1 VRAM Type	N/A
Audio	Audio Chipset	Realtek ALC897
	Audio Type	2.1 Channel HD Audio
Storage	SSD Interface	PCIe GEN3x4
	SSD Form Factor	M.2-2280 M-KEY
	SSD Config	256GB*1
	SSD Size	256GB
	HDD1 Interface	N/A
	HDD1 Form Factor	N/A
	HDD1 Size	N/A
	HDD1 RPM	N/A
	ODD(Type)	N/A
	ODD Height	N/A
	ODD Type	N/A
	mSATA slots(Free)	0
	M.2 slots(Total)	1
	M.2 slots(Free)	0
	2.5" Drive Bays(Total)	1
	2.5" Drive Bays (Free)	1
	3.5" Drive Bays(Total)	N/A
	3.5" Drive Bays(Free)	0
Communications	LAN	Intel I219-V
	WLAN Version	Wi-Fi 6E+BT
	BT Version	5.3



МОНОБЛОКИ

PRO AP272P 12MA

PRO AP272P 12MA-830XRU

Input Device	Webcam	internal webcam
	Webcam Resolution	2.0MP (1080P)
	Webcam supports Windows Hello or not	Yes
I/O Ports (Side)	USB 3.2 Gen 2x2 Type A	N/A
	USB 2.0 Type A	N/A
	Type-C in	N/A
	Mic-in	N/A
	Headphone-out	N/A
	Headphone-out (HiFi / SPDIF)	N/A
	Mic-in/Headphone-out combo	N/A
	Card Reader	N/A
	Thunderbolt	N/A
	USB 3.2 Gen 2x2 (20G) Type C	N/A
	USB 3.2 Gen 2 (10G) Type C	N/A
	USB 3.2 Gen 2 (10G) Type A	N/A
	USB 3.2 Gen 1 (5G) Type C	N/A
	USB 3.2 Gen 1 (5G) Type A	2
I/O Ports (Rear)	USB 3.2 Gen 2x2 Type A (R)	N/A
	USB 2.0 Type C (R)	N/A
	USB 2.0 Type A (R)	2
	USB 2.0 Type A (Top)	N/A
	RJ45	1
	VGA out	N/A
	HDMI out	1x (v2.1)
	HDMI in	N/A
	DP out	1x (v1.4)
	mini DP out	N/A
	Line-out (R)	1
	PS/2	N/A
	COM Port	N/A
	DVI-D out	N/A
	Mic-in/Headphone-out combo (R)	N/A
	Printer Port (Parallel)	N/A
	Lock type	Kensington
	USB 3.2 Gen 2x2 (20G) Type C (R)	N/A
	USB 3.2 Gen 2 (10G) Type C (R)	1
	USB 3.2 Gen 2 (10G) Type A (R)	1
	USB 3.2 Gen 1 (5G) Type C (R)	N/A
	USB 3.2 Gen 1 (5G) Type A (R)	N/A
	Mic-in (R)	1
	Headphone-out (R)	N/A
Warranty	Warranty	12months
Dimension & Weight	Product Dimension with Holder (WxDxH) (mm)	N/A
	Product Dimension with Holder (WxDxH) (inch)	N/A
	Product Dimension with Stand (WxDxH) (mm)	613.49 x 268.00 x 457.66
	Product Dimension with Stand (WxDxH) (inch)	24.15 x 10.55 x 18.02
	Outer Carton Dimension with Holder (WxDxH) (mm)	N/A
	Outer Carton Dimension with Holder (WxDxH) (inch)	N/A
	Outer Carton Dimension with Stand (WxDxH) (mm)	711 x 232 x 514
	Outer Carton Dimension with Stand (WxDxH) (inch)	27.99 x 9.13 x 20.24
	Weight (Net kg)	4.63
	Weight (Net lbs)	10.21
	Weight (Gross kg)	8
	Weight (Gross lbs)	17.64
	Adjustment (Tilt)	-4°~20°(+/-2°)
STAND	Adjustment (Swivel)	N/A
	Adjustment (Height)	N/A
	Adjustment (Pivot)	N/A



МОНОБЛОКИ

PRO AP272P 12MA

PRO AP272P 12MA-830XRU

Power	AC Adapter Output	120W
Regulatory Compliance	Regulatory Compliance	FCC(Class B), CB/CE, UL(CUL), BSMI, VCCI, RCM(C-Tick)
In The Box	AC Adaptor	1
	Power Cord	1
	Warranty Card	N/A
	Quick Guide	1
	User Manual	1
	VESA Mount kit	N/A
	Keyboard Interface	WIRELESS
	Mouse	MA04W
	Mouse Interface	WIRELESS
Barcode Info	EAN	4711377266086