

The New Esports Meta


Играйте на пределе возможностей с монитором MSI Oculux NXG253R – оптимизированной под киберспорт моделью с 24,5-дюймовым IPS-экраном формата 1080p и отличными скоростными характеристиками (частота обновления – 360 Гц, время отклика – 1 мс GtG). Устройство поддерживает технологию адаптивной синхронизации NVIDIA G-Sync, помогающую повысить качество изображения в играх (для ее активации необходима совместимая видеокарта с графическим процессором NVIDIA).



Picture and logos

SELLING POINTS

- Технология адаптивной синхронизации NVIDIA G-SYNC: повышенное качество отображения динамичных игровых сцен
- Быстрая IPS-панель: низкое время отклика (1 мс GtG) и отличная цветопередача
- Экстремально высокая частота обновления экрана: 360 Гц
- Низкое время отклика ЖК-матрицы: 1 мс (при переключении между полутонами – GtG)
- Технология NVIDIA Reflex Latency Analyzer: точное измерение задержки отображения компьютерной системы
- Технология Ultra Low Motion Blur: минимизация смазывания движущихся объектов
- Эргономичная подставка: удобная настройка положения экрана монитора
- Широкий цветовой охват: реалистичное отображение каждого оттенка
- Сверхтонкая экранная рамка: ничто не отвлекает взгляд от изображения
- Комфорт для пользователя: подавление мерцания экрана и снижение интенсивности синего света
- Широкие углы обзора: 178°

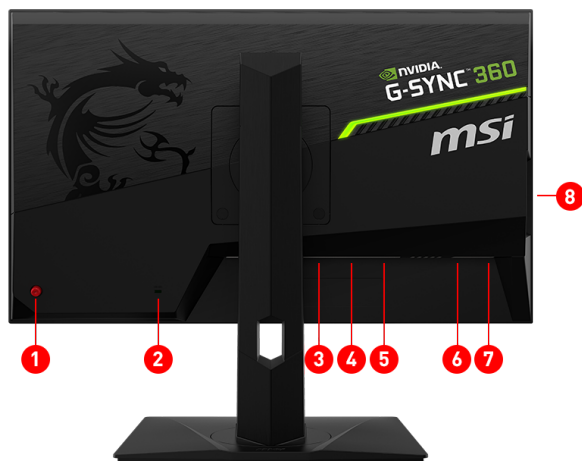

1. 5-way joystick navigator
2. Kensington Lock
3. 2x HDMI™ (2.0b)
4. 1x Display Port (1.4)
5. 1x Earphone out
6. DC Jack
7. 1x USB 3.2 Gen 1 Type B
8. 3x USB 3.2 Gen 1 Type A



МОНИТОРЫ

Oculux NXG253R

OCULUX NXG253R

SPECIFICATION

Model	Part No	9S6-3BB07T-012
	MKT Name	Oculux NXG253R
	MKT Spec	Oculux NXG253R
	Entity MKT Name	Oculux NXG253R
	Color	ID1/Black-Black
Display	Screen Size	24.5" (62.2cm)
	Active Display Area (mm)	543.168(H) x 302.616(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch	0.2829(H)x0.2802(V)
	Pixel pitch (mm)	0.2829(H)x0.2802(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	G-SYNC
	Dynamic Refresh Rate Activated Range	0-360Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	400
	HDR Brightness (Peak nits)	400
	Contrast Ratio	1000:1
	Signal Frequency	150.9~417.6 KHz(H) / 48~360 Hz(V)
	Activated Range	0-360Hz
	Refresh Rate	360Hz
	Response Time (MPRT)	1ms (ULMB)
	Response Time (GTG)	1ms
	View Angles	178°(H)/178°(V)
	Surface Treatment	Anti-glare
	NTSC (CIE1976 area percentage/overlap)	95.85%/80.24%
	NTSC (CIE1931 area percentage/overlap)	78.7%/74.04%
	sRGB (CIE1976 area percentage/overlap)	109.63%/98.04%
	sRGB (CIE1931 area percentage/overlap)	111.12%/98.94%
	Adobe RGB (CIE1976 area percentage/overlap)	93.97%/85.47%
	Adobe RGB (CIE1931 area percentage/overlap)	82.37%/77.02%
	DCI-P3 (CIE1976 area percentage/overlap)	87.31%/84.09%
	DCI-P3 (CIE1931 area percentage/overlap)	81.91%/81.2%
	Rec.709 (CIE1976 area percentage/overlap)	95.85%/80.24%
	Rec.709 (CIE1931 area percentage/overlap)	78.7%/74.04%
	Rec.2020 (CIE1976 area percentage/overlap)	N/A
	Rec.2020 (CIE1931 area percentage/overlap)	N/A
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
Input Device	WebCam	N/A
I/O Ports	HDMI™	2
	HDMI™ version	2.0b
	DisplayPort	1
	DisplayPort version	1.4
	Headphone-out	1
	Lock type	Kensington Lock
	Speaker	N/A
	USB 3.2 Gen 1 Type B	1
I/O Ports (Front)	USB 3.2 Gen 1 Type A	3
Power	Power Type	External Adaptor 20V 4.5A
	Power Input	100~240V, 50/60Hz
	Energy Efficiency Rating	F
	Adapter's KC safety Number	SU10469-16001
	Power Cord Type	C5



МОНИТОРЫ

Oculux NXG253R

OCULUX NXG253R

In The Box	DisplayPort Cable	1
	HDMI™ Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	Mouse Bungee Unit	N/A
	VESA Screw	N/A
	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
	Quick Guide	1
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
	Frameless Design	Yes
Dimension & Weight	Inside Carton Dimension (WxDxH) (mm)	761 x 207 x 410
	Inside Carton Dimension (WxDxH) (inch)	29.96 x 8.15 x 16.14
	Weight (Net kg)	6.47
	Weight (Gross kg)	9.02
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	560.1 x 233.7 x 399.3
	Product Dimension with Stand (WxDxH) (inch)	22.05 x 9.2 x 15.72
Stand Dimension (WxDxH)	Stand Dimension (WxDxH) (mm)	303.3 x 233.7 x 416.7
	Stand Dimension (WxDxH) (inch)	11.94 x 9.2 x 16.41
Product Dimension without Stand (WxDxH)	Product Dimension without Stand (WxDxH) (mm)	560.1 x 64.3 x 335.5
	Product Dimension without Stand (WxDxH) (inch)	22.05 x 2.53 x 13.21
Outer Carton Dimension (WxDxH)	Outer Carton Dimension (WxDxH) (mm)	776 x 222 x 435
	Outer Carton Dimension (WxDxH) (inch)	30.55 x 8.74 x 17.13
Weight	Weight Without Stand (kg)	N/A
Warranty	Warranty	12M
Barcode Info	EAN	4719072836818
	UPC	824142254004
	UCC14	10824142254001