

**See beyond the Game.
Visualize your victory.**




Selling Points

- Изогнутый экран с кривизной 1500R: максимальное погружение в игру.
- Частота обновления 165 Гц: Действительно плавная игра.
- Время отклика 1мс: устраняет разрывы экрана и частоту смены кадров.
- Приложение Gaming OSD: оптимизируйте настройки монитора под конкретные игры.
- Поддержка технологии HDR: расширенный динамический диапазон увеличивает контрастность.
- Режим Night Vision: «ночное зрение»...



Picture and logos

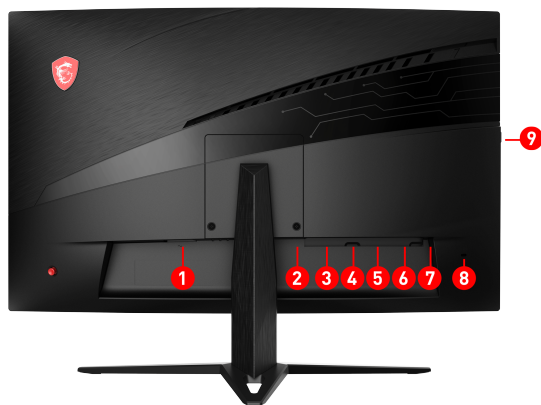

1. Power Jack
2. 1x Display Port 1.2a
3. 2x HDMI 2.0b
4. 1x USB Type C (For DP and Charge)
5. 1x Earphone
6. 2x USB 2.0 Type A
7. 1x USB 2.0 Type B (PC to Monitor)
8. 1x Kensington Lock
9. Headset Hanger



М О Н И Т О Р Ы

Optix MAG272C

OPTIX MAG272C

Specification

Entity MKT Name	Optix MAG272C
Color	ID1/Black-Black
Screen Size	27" (69 cm)
Active Display Area (mm)	597.888 (H) x 336.312 (V)
Curvature	Curve 1500R
Panel Type	VA
Resolution	1920x1080 (FHD)
Pixel pitch	0.3114(H)X0.3114(V)
Aspect Ratio	16:9
Dynamic Refresh Rate technology	FreeSync
Activated Range	48Hz-165Hz
HDR (High dynamic range)	HDR ready
SDR Brightness (nits)	250
Contrast Ratio	3000:1
DCR (Dynamic Contrast Ratio)	100000000:1
Signal Frequency	53~183 KHz(H) / 48~165 Hz(V)
Refresh Rate	165HZ
Response Time (MPRT)	1ms(MPRT)
Response Time (GTG)	4ms
Response Time (Tr + Tf)	N/A
View Angles	178°(H)/178°(V)
NTSC (CIE1976 area percentageoverlap)	98.3% / 87.0%
NTSC (CIE1931 area percentageoverlap)	84.9% / 80.3%
sRGB (CIE1976 area percentageoverlap)	112.8% / 96.6%
sRGB (CIE1931 area percentageoverlap)	119.9% / 99.1%
Adobe RGB (CIE1976 area percentageoverlap)	96.6% / 89.1%
Adobe RGB (CIE1931 area percentageoverlap)	88.8% / 83.7%
DCI-P3 (CIE1976 area percentageoverlap)	89.8% / 89.5%
DCI-P3 (CIE1931 area percentageoverlap)	88.4% / 88.3%
Rec.709 (CIE1976 area percentageoverlap)	112.8% / 96.6%
Rec.709 (CIE1931 area percentageoverlap)	119.9% / 99.1%
Surface Treatment	Anti-glare
Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)
Note_DP	1920 x 1080 (Up to 165Hz)
Note_HDMI	1920 x 1080 (Up to 165Hz)
Note_DVI	N/A
HDMI	2
HDMI version	2.0
HDMI HDCP version	NA
DisplayPort	1
DisplayPort version	1.2a
DisplayPort HDCP version	NA
Thunderbolt version	NA
Thunderbolt HDCP version	NA
USB Type C (DisplayPort Alternate)	1
DVI	NA
D-Sub	NA
Mic-in	NA
Headphone-out	1
Audio Combo	NA
USB 2.0 Type B	1
USB 3.2 Gen 1 Type B	NA
Lock type	Kensington Lock
Power Type	Power Cable
Power Input	100~240V, 50/60Hz
Adapter's KC safety Number	NA
Power Cord Type	N/A
QC Output	N/A
QC Output Power	N/A
PD Output	N/A
PD Output Power	N/A
Adjustment (Tilt)	-5° ~ 20°



М О Н И Т О Р Ы

Optix MAG272C

OPTIX MAG272C

Adjustment (Swivel)	NA
Adjustment (Height)	NA
Adjustment (Pivot)	NA
VESA Mounting	100x100mm
Frameless Design	Yes
Outer Carton Dimension (WxDxH) (mm)	756 x 168 x 473
Outer Carton Dimension (WxDxH) (inch)	29.76 x 6.61 x 18.62
Product Dimension with Stand (WxDxH) (mm)	611.5 x 225.0 x 455.0
Product Dimension with Stand (WxDxH) (inch)	24.07 x 8.86 x 17.91
Product Dimension without Stand (WxDxH) (mm)	611.5 x 87.5 x 372.74
Product Dimension without Stand (WxDxH) (inch)	24.07 x 3.44 x 14.67
Thunderbolt	NA
USB 2.0 Type A	2
USB 2.0 Type C	NA
USB 3.2 Gen 1 Type A	NA
USB 3.2 Gen 1 Type C	NA
USB 3.2 Gen 2x2 Type C	NA
USB 3.2 Gen 2x2 Type A	NA
Card Reader	NA
Stand Dimension (WxDxH) (mm)	382.6 x 231.5 x 417.65
Stand Dimension (WxDxH) (inch)	15.06 x 9.11 x 16.44
Feature	Gaming Mode CrossHair Adaptive Sync (Freesync) 5 Ways Joystick Navigator Control Frameless design MSI Gaming OSD MSI Gaming OSD APP USB Connector Support
Inside Carton Dimension (WxDxH) (mm)	765 x 168 x 473
Inside Carton Dimension (WxDxH) (inch)	30.12 x 6.61 x 18.62
Weight (Net kg)	5.4
Weight (Gross kg)	7.8
DisplayPort Cable	0
HDMI Cable	1
DVI Cable	0
USB Type A to Type B Cable	1
USB Type C to Type A Cable	N/A
USB Type C to Type C Cable	0
Thunderbolt Cable	N/A
VGA Cable	0
3.5mm audio Cable	0
3.5mm combo audio Cable	0
Warranty	36M
Power Cord	1
AC Adaptor	0
Quick Guide	1
Warranty Card	1
EAN	4719072698676