


БОЛЬШОЕ ОКНО В МИР



Picture and logos

SELLING POINTS

- Технология EyesErgo+ для комфорта глаз пользователя
- Сертифицированная лабораторией TÜV технология круговой поляризации для имитации естественного света
- Технология Less Blue Light PRO: защищает пользователя от вредного синего света без ущерба для цветопередачи
- Система проверки зрения Eye-Q Check с напоминаниями о необходимости отдыха от монитора
- Передача видеосигнала и электропитание по USB-C (65 Вт)
- KVM-модуль: использование одного комплекта периферийных устройств (клавиатура + мышь) для управления несколькими компьютерами
- Повышенная частота обновления экрана - 144 Гц
- Фабричная калибровка цветопередачи ($\Delta E \leq 2$)
- Эргономичная подставка с гибкой настройкой положения экрана (наклон, поворот, регулировка высоты)
- Два встроенных динамика

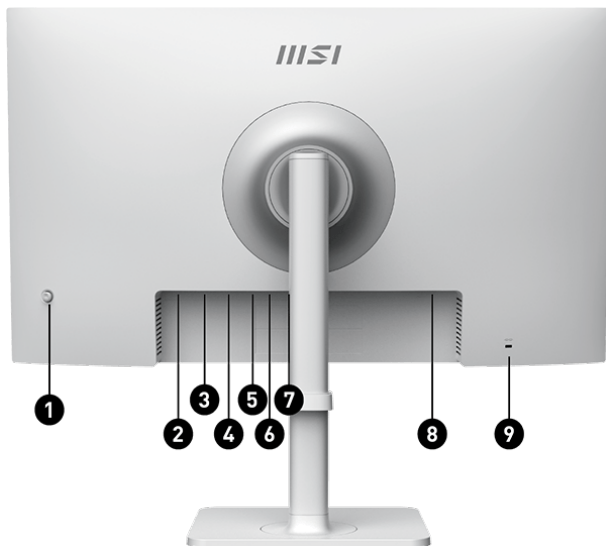

1. 5-позиционная навигационная клавиша
2. 1 x USB 5 Гбит/с Type-B
3. 2 x USB 5 Гбит/с Type-A
4. 1 x Type-C (DP alt.) с питанием 65 Вт (PD)
5. 1 x DisplayPort 1.2a
6. 1 x HDMI™ 2.0b (FHD@144 Гц)
7. 1 x Выход на наушники
8. AC-in
9. Замок Kensington



МОНИТОРЫ БИЗНЕС И
ПРОДУКТИВНОСТЬ

PRO MAX 241PHW E14

PRO MAX 241PHW E14

SPECIFICATION

Model	Part No	9S6-3PF44H-010
	Color	ID1/White-White
Display	Screen Size	23.8" (60.45cm)
	Active Display Area (mm)	527.04(H) x 296.46(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.2745(H)x0.2745(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	FreeSync
	Dynamic Refresh Rate Activated Range	48~144Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	1500:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	54~169.78 KHz(H) /48~144 Hz(V)
	Refresh Rate	144HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	108%/88%
	NTSC (CIE1931 area percentage/overlap)	89%/82%
	sRGB (CIE1976 area percentage/overlap)	122%/99%
	sRGB (CIE1931 area percentage/overlap)	126%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	104%/93%
	Adobe RGB (CIE1931 area percentage/overlap)	93%/85%
	DCI-P3 (CIE1976 area percentage/overlap)	99%/96%
	DCI-P3 (CIE1931 area percentage/overlap)	93%/92%
	Rec.709 (CIE1976 area percentage/overlap)	122%/99%
	Rec.709 (CIE1931 area percentage/overlap)	126%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	71%/72%
	Rec.2020 (CIE1931 area percentage/overlap)	66%/67%
	Surface Treatment	Anti-glare with Circular Polarization
	Display Colors	16.7M
	Color bit	8 bits (6 bits + FRC)
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 3.2 Gen 1 Type A	2
	USB 3.2 Gen 1 Type B	1
	Card reader	N/A
	Lock type	Kensington Lock
	Speaker	3Wx 2
	HDMI	1
	HDMI version	2.0b
	HDMI HDCP version	2.2
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	2.2
Warranty	Warranty	12M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	14
	Annual Energy Consumption (KWh)	14
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	D
	Power Cord Type	C13



МОНИТОРЫ БИЗНЕС И
ПРОДУКТИВНОСТЬ

PRO MAX 241PHW E14

PRO MAX 241PHW E14

In The Box	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	1
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	75x75mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	541.93 x 200.81 x 381.11
	Product Dimension without Stand (WxDxH) (mm)	541.93 x 65.44 x 322.28
	Stand Dimension (WxDxH) (mm)	230.81 x 200.81 x 415.72
	Weight (Net kg)	5.35
	Weight Without Stand (kg)	3.45
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	81.4 x 14.9 x 41
	Outer Carton Dimension (WxDxH) (cm)	82.9 x 16.2 x 43.4
	Weight (Gross kg)	8.
Barcode Info	EAN	4711377396288