

The New Esports Meta

MSI Oculux NXG253R is especially designed for esports gaming. With Nvidia G-SYNC technology built in, gamers can enjoy the wonderful tearing-free gaming experience. The ultra-high 360hz refresh rate and 1ms response time Rapid IPS panel will provide pro-gamers both smooth and clear in-game images. The 24.5 inch, thin bezel design is also convenient for multi-screen setups. Light bars on the back of the monitor also support MSI Mystic Light, allowing gamers to create their own gaming style with their favorite colors. The unique adjustable stand design allows gamers to position their monitors based on their preferences. With all the gaming elements it has, MSI Oculux NXG253R is ready to bring gamers into endless victories.




Selling Points

- NVIDIA G-SYNC - Prevent screen tearing or stuttering, producing ultra-smooth lag-free gameplay.
- Rapid IPS - Provides 1ms GTG fast response time, optimizes screen colors and brightness.
- 360Hz Extremely High Refresh Rate - Respond faster with smoother frames.
- 1ms GTG Response Time - Eliminate screen tearing and choppy frame rates.
- NVIDIA Reflex Latency Analyzer - Give an accurate measurement of system latency.
- ULMB (Ultra Low Motion Blur) - Silky-smooth and crystal-clear moving objects.
- Adjustable Stand - Easily change the position of the monitor for maximum ergonomics.
- Wide Color Gamut - Game colors and details will look more realistic and refined.
- Fr ...



Picture and logos

System I/O-Ports

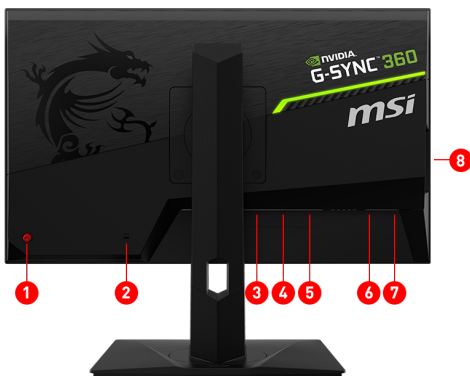

1. 5-way joystick navigator
2. Kensington Lock
3. 2x HDMI (2.0b)
4. 1x Display Port (1.4)
5. 1x Earphone out
6. DC Jack
7. 1x USB 3.2 Gen 1 Type B
8. 3x USB 3.2 Gen 1 Type A

Specification

Display	Screen Size	24.5" (62.2cm)
	Active Display Area (mm)	543.168(H) x 302.616(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch	0.2829(H)x0.2802(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	G-SYNC
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	400
	HDR Brightness (Peak nits)	400
	Contrast Ratio	1000:1
	Signal Frequency	150.9~417.6 KHz(H) / 48~360 Hz(V)
	Activated Range	0-360Hz
	Refresh Rate	360Hz
	Response Time (MPRT)	1ms (ULMB)
	Response Time (GTG)	1ms
	View Angles	178°(H)/178°(V)
	Surface Treatment	Anti-glare
	NTSC (CIE1976 area percentage/overlap)	95.85%/80.24%
	NTSC (CIE1931 area percentage/overlap)	78.7%/74.04%
	sRGB (CIE1976 area percentage/overlap)	109.63%/98.04%
	sRGB (CIE1931 area percentage/overlap)	111.12%/98.94%
	Adobe RGB (CIE1976 area percentage/overlap)	93.97%/85.47%
	Adobe RGB (CIE1931 area percentage/overlap)	82.37%/77.02%
	DCI-P3 (CIE1976 area percentage/overlap)	87.31%/84.09%
	DCI-P3 (CIE1931 area percentage/overlap)	81.91%/81.2%
	Rec.709 (CIE1976 area percentage/overlap)	95.85%/80.24%
	Rec.709 (CIE1931 area percentage/overlap)	78.7%/74.04%
	Rec.2020 (CIE1976 area percentage/overlap)	N/A
	Rec.2020 (CIE1931 area percentage/overlap)	N/A
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
Note_DP	1920 x 1080 (Up to 360Hz)	
Note_HDMI	1920 x 1080(Up to 240Hz)	
Note_DVI	N/A	
Onboard Graphics	HDMI	2
I/O Ports	HDMI version	2.0b
	DisplayPort	1
	DisplayPort version	1.4
	Headphone-out	1
	Lock type	Kensington Lock
	Speaker	N/A
I/O Ports (Front)	USB 3.2 Gen 1 Type B	1
	USB 5Gbps (USB 3.2 Gen 1 Type-A)	3
Power	Power Supply Type	External Adaptor 20V 4.5A
	Power Input	100~240V, 50/60Hz
	Adapter's KC safety Number	SU10469-16001
	Power Cord Type	C5

Accessories	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	Mouse Bungee Unit	N/A
	VESA Screw	N/A
	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
Quick Guide	1	
Input Device	WebCam	N/A
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
	Frameless Design	Yes
Outer Carton Dimension (WxDxH)	Outer Carton Dimension (WxDxH) (mm)	776 x 222 x 435
	Outer Carton Dimension (WxDxH) (inch)	30.55 x 8.74 x 17.13
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	560.1 x 233.7 x 399.3
	Product Dimension with Stand (WxDxH) (inch)	22.05 x 9.2 x 15.72
Product Dimension without Stand (WxDxH)	Product Dimension without Stand (WxDxH) (mm)	560.1 x 64.3 x 335.5
	Product Dimension without Stand (WxDxH) (inch)	22.05 x 2.53 x 13.21
Stand Dimension (WxDxH)	Stand Dimension (WxDxH) (mm)	303.3 x 233.7 x 416.7
	Stand Dimension (WxDxH) (inch)	11.94 x 9.2 x 16.41
Dimension&Weight	Inside Carton Dimensions (WxDxH) (mm)	761 x 207 x 410
	Inside Carton Dimensions (WxDxH) (inch)	29.96 x 8.15 x 16.14
	Weight (Net kg)	6.47
	Weight (Gross kg)	9.02
Weight	Weight Without Stand (kg)	N/A
Warranty	Warranty	36M
Barcode Info	EAN	4719072809478