

PATH TO THE FUTURE


Introducing the MSI MAG 274QPF E20 esports gaming monitor. This cutting-edge monitor features a 27-inch WQHD display with a lightning-fast 200Hz refresh rate and a rapid 0.5ms (GtG, Min.) response time. With the MAG 274QPF E20, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

SELLING POINTS

- Rapid IPS Panel – Provides 0.5ms (GtG, Min.) response time, optimizes screen colors and brightness.
- 200Hz Refresh Rate – Respond faster with smoother frames.
- 0.5ms (GtG, Min.) Response Time – Eliminate screen tearing and choppy frame rates.
- AI Vision – The new AI Vision technology can not only reveal details in dark areas but also enhance overall brightness and saturate colors.
- Less Blue Light – Use a software solution to reduce the light emission in the blue-violet region of the blue light spectrum.

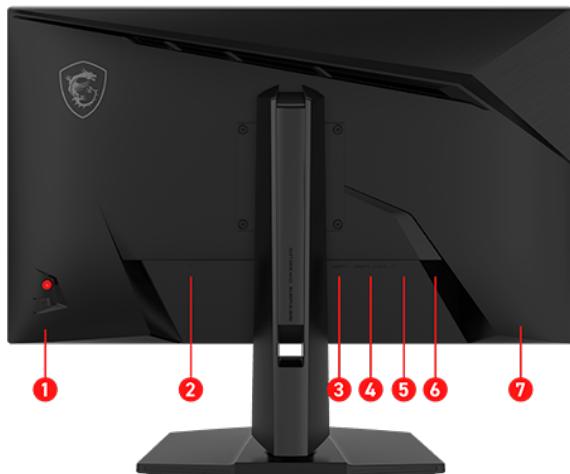

1. 5-way Joystick Navigator
2. AC-in
3. Display Port 1.4a(HBR3)
4. 2 x HDMI™ 2.0b (WQHD@144Hz)
5. Type-C (DP alt.) w/ 15W PD
6. Headphone out
7. Kensington Lock



MONITOR

MAG 274QPF E20

MAG 274QPF E20

SPECIFICATION

Model	Part No	9S6-3CF69T-010
	Color	ID1/Black-Black
	Local Dimming	4 Zones
Display	Screen Size	27" (68.58 cm)
	Active Display Area (mm)	596.736(H) x 335.664(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~200Hz
	HDR (High dynamic range)	VESA DisplayHDR 400
	SDR Brightness (nits)	300
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	72~300 KHz(H) /48~200 Hz(V)
	Refresh Rate	200Hz
	Response Time (GTG)	0.5ms (Min.)
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	TBD
	NTSC (CIE1931 area percentage/overlap)	TBD
	SRGB (CIE1976 area percentage/overlap)	TBD
	SRGB (CIE1931 area percentage/overlap)	TBD
	Adobe RGB (CIE1976 area percentage/overlap)	TBD
	Adobe RGB (CIE1931 area percentage/overlap)	TBD
	DCI-P3 (CIE1976 area percentage/overlap)	TBD
	DCI-P3 (CIE1931 area percentage/overlap)	TBD
	Rec.709 (CIE1976 area percentage/overlap)	TBD
	Rec.709 (CIE1931 area percentage/overlap)	TBD
	Rec.2020 (CIE1976 area percentage/overlap)	TBD
	Rec.2020 (CIE1931 area percentage/overlap)	TBD
I/O Ports	Surface Treatment	Anti-glare
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
Warranty	DisplayPort	1
	DisplayPort version	1.4a (HBR3)
Power	DisplayPort HDCP version	2.3
	Warranty	36M
	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Annual Energy Consumption (KWh)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	TBD
	Power Cord Type	C13



MONITOR

MAG 274QPF E20

MAG 274QPF E20

In The Box	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	TBD x TBD x TBD
	Product Dimension without Stand (WxDxH) (mm)	TBD x TBD x TBD
	Stand Dimension (WxDxH) (mm)	TBD x TBD x TBD
	Weight (Net kg)	TBD
	Weight Without Stand (kg)	TBD
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	84 x 14.8 x 47.5
	Outer Carton Dimension (WxDxH) (cm)	85.5 x 16.3 x 49.8
	Weight (Gross kg)	TBD
Barcode Info	EAN	4711377370769