

PATH TO THE FUTURE


Introducing the MSI MAG 274PFW esports gaming monitor. This cutting-edge monitor features a 27-inch FHD display with a lightning-fast 180Hz refresh rate and a rapid 1ms response time. With the MAG 274PFW, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

SELLING POINTS

- Rapid IPS Panel - Provides 1ms GtG fast response time, optimizes screen colors and brightness.
- 180Hz Refresh Rate - Respond faster with smoother frames.
- 1ms GtG Response Time - Eliminate screen tearing and choppy frame rates.
- Adjustable Stand - Easily change the position of the monitor for maximum ergonomics.
- Adaptive-Sync Technology - Tear free, stutter free, fluid gaming.
- HDR Ready-Provide eye-catching detail through contrast and shadows adjustment.
- AI Vision - The new AI Vision technology can not only reveal details in dark areas but also enhance overall brightness and saturate colors.

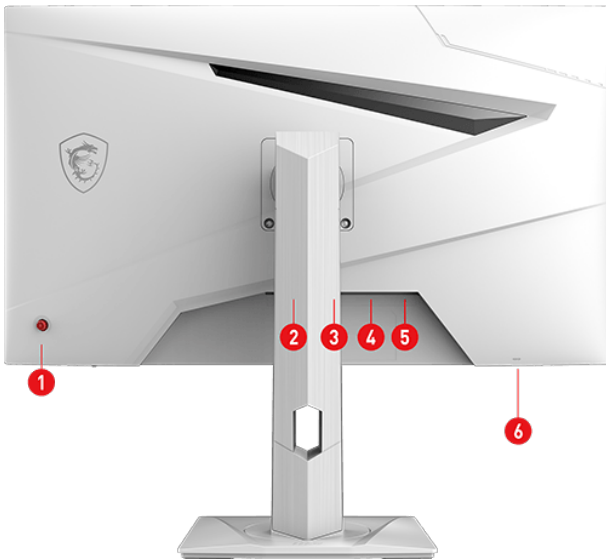

1. 5-Way Joystick Navigator
2. HDMI™ 2.1 (FHD@180Hz)
3. Display Port 1.2a
4. Earphone Out
5. DC-in
6. Kensington Lock

SPECIFICATION

Model	Part No	9S6-3CC29H-400
	Color	ID1/White-White
Display	Screen Size	27" (69 cm)
	Active Display Area (mm)	597.888(H) x 336.312(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.3114(H)x0.3114(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~180Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	10000000:1
	Signal Frequency	30~200 KHz(H) / 48~180 Hz(V)
	Refresh Rate	180Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	1ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	103%/86%
	NTSC (CIE1931 area percentage/overlap)	89%/82%
	sRGB (CIE1976 area percentage/overlap)	117%/99%
	sRGB (CIE1931 area percentage/overlap)	126%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	100%/90%
	Adobe RGB (CIE1931 area percentage/overlap)	93%/86%
	DCI-P3 (CIE1976 area percentage/overlap)	93%/92%
	DCI-P3 (CIE1931 area percentage/overlap)	92%/92%
	Rec.709 (CIE1976 area percentage/overlap)	117%/99%
	Rec.709 (CIE1931 area percentage/overlap)	126%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	68%/68%
	Rec.2020 (CIE1931 area percentage/overlap)	66%/66%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
I/O Ports	Headphone-out	1
	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	External Adaptor 12V 3A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	21
	Annual Energy Consumption (KWh)	21
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	E
Power Cord Type	C13	

Accessories	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	75x75mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	613.5 x 196.5 x 402.1
	Product Dimension without Stand (WxDxH) (mm)	613.5 x 69.8 x 362.5
	Stand Dimension (WxDxH) (mm)	242.2 x 196.5 x 399.2
	Weight (Net kg)	6.05
	Weight Without Stand (kg)	3.95
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	81.5 x 14.5 x 50.2
	Outer Carton Dimension (WxDxH) (cm)	83 x 15.8 x 52.6
	Weight (Gross kg)	7.85
Barcode Info	EAN	4711377196482