

## PATH TO THE FUTURE


Introducing the MSI MPG 346CQRF X24 esports gaming monitor. This cutting-edge monitor features a 34-inch UWQHD display with a lightning-fast 240Hz refresh rate and a rapid 1ms MPRT response time. With the MPG 346CQRF X24, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

## SELLING POINTS

- Rapid VA Panel - Provides 0.5ms (GtG, Min.) response time, optimizes screen colors and brightness.
- 240Hz Refresh Rate - Respond faster with smoother frames.
- 0.5ms (GtG, Min.) Response Time - Eliminate screen tearing and choppy frame rates.
- Adjustable Stand - Easily change the position of the monitor for maximum ergonomics.
- VESA DisplayHDR 400 - Stunning visuals through contrast and shadow adjustment.
- MSI Gaming Intelligence™ provides a series of smart gaming features based on AI technologies for enhanced gaming experience
- AI Vision - The new AI Vision technology can not only reveal details in dark areas but also enhance overall brightness and saturate colors.

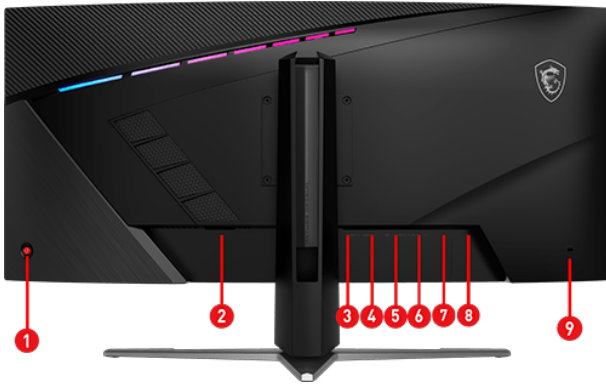

1. 5-way Joystick Navigator
2. AC-in
3. 2x HDMI™ 2.1 (UWQHD@240Hz)
4. DisplayPort 1.4a (HBR3)
5. Type-C (DP alt.) w/ 98W PD
6. USB 2.0 Type-B
7. 2x USB 2.0 Type-A
8. Headphone-out
9. Kensington Lock

**SPECIFICATION**

Model	Part No	9S6-3DD94M-003
	Color	ID1/Black-Black
Display	Screen Size	34" (86.36 cm)
	Active Display Area (mm)	797.22(H) x 333.72(V)
	Curvature	Curve 1500R
	Panel Type	Rapid VA
	Resolution	3440x1440 (UWQHD)
	Pixel pitch (mm)	0.23175(H)x0.23175(V)
	Aspect Ratio	21:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	DisplayHDR 400
	SDR Brightness (nits)	400
	HDR Brightness (Peak nits)	400
	Contrast Ratio	4000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	TBD
	Refresh Rate	240HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	0.5ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	TBD
	NTSC (CIE1931 area percentage/overlap)	TBD
	sRGB (CIE1976 area percentage/overlap)	TBD
	sRGB (CIE1931 area percentage/overlap)	TBD
	Adobe RGB (CIE1976 area percentage/overlap)	TBD
	Adobe RGB (CIE1931 area percentage/overlap)	TBD
	DCI-P3 (CIE1976 area percentage/overlap)	TBD
	DCI-P3 (CIE1931 area percentage/overlap)	TBD
	Rec.709 (CIE1976 area percentage/overlap)	TBD
	Rec.709 (CIE1931 area percentage/overlap)	TBD
	Rec.2020 (CIE1976 area percentage/overlap)	TBD
	Rec.2020 (CIE1931 area percentage/overlap)	TBD
	Surface Treatment	Anti-glare
	Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)	
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1 (FRL 10G)
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Annual Energy Consumption (KWh)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	TBD
Power Cord Type	C13	

Accessories	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	1
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	TBD x TBD x TBD
	Product Dimension without Stand (WxDxH) (mm)	TBD x TBD x TBD
	Stand Dimension (WxDxH) (mm)	TBD x TBD x TBD
	Weight (Net kg)	TBD
	Weight Without Stand (kg)	TBD
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	N/A
	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	TBD
Barcode Info	EAN	4711377342216