

PATH TO THE FUTURE


The MSI MPG 272URX QD-OLED Gaming Monitor, 27 inches of stunning QD-OLED, 3840x2160 (4K UHD) and 240Hz for ultra-smooth visuals. Perfect for competitive gamers seeking immersion. Upgrade your setup—check out now and game on!



Picture and logos

SELLING POINTS

- 5-layer tandem OLED panel with EL Gen 3 technology – Light efficiency up to 30%.
- DisplayPort 2.1a (UHBR20) – Offering up to 80Gbps bandwidth, allowing gamers to enjoy native, lossless 4K at 240Hz for a smoother experience.
- Fastest 0.03ms GtG response time and 240Hz refresh rate.
- QD Premium Color – Ensures the color meets the market standard – Delta E≤2.
- Incredible HDR visual – VESA DisplayHDR True Black 400.
- MSI OLED Care 2.0 – Reduced the risk of OLED image burn-in.
- 3-Year Burn-In Warranty – Including coverage for OLED burn-in.

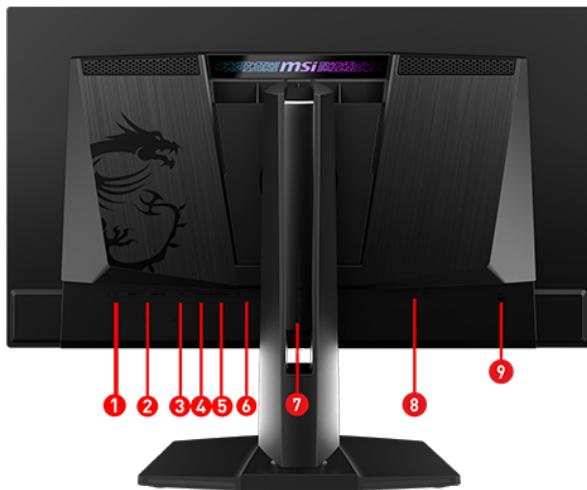

1. Headphone-out
2. 2x HDMI™ 2.1 (UHD@240Hz)
3. DisplayPort 2.1 (UHBR20)
4. USB Type-C (98W PD)
5. USB Type-B
6. 2x USB Type-A
7. 5-way Joystick Navigator
8. AC-in
9. Kensington lock



MÀN HÌNH

MPG 272URX QD-OLED

MPG 272URX QD-OLED

SPECIFICATION

| | | |
|-----------|---|-----------------------|
| Model | Part No | 9S6-3CD79A-015 |
| | Color | ID1/Black-Black |
| Display | Screen Size | 26.5" (67.31 cm) |
| | Active Display Area (mm) | 589.97(H) x 332.93(V) |
| | Curvature | Flat |
| | Panel Type | QD-OLED |
| | Resolution | 3840x2160 (UHD) |
| | Pixel pitch (mm) | 0.153(H)x0.153(V) |
| | Aspect Ratio | 16:9 |
| | Dynamic Refresh Rate technology | Adaptive-Sync |
| | Dynamic Refresh Rate Activated Range | 48~240Hz |
| | HDR (High dynamic range) | True Black 400 |
| | SDR Brightness (nits) | 250 |
| | HDR Brightness (Peak nits) | 1000 |
| | Contrast Ratio | 1500000:1 |
| | Signal Frequency | TBD |
| | Refresh Rate | 240HZ |
| | Response Time (GTG) | 0.03ms |
| | View Angles | 178°(H)/178°(V) |
| | NTSC (CIE1976 area percentage/overlap) | 120.5%,93.8% |
| | NTSC (CIE1931 area percentage/overlap) | 103.6%,91.5% |
| | SRGB (CIE1976 area percentage/overlap) | 138.2%,100% |
| | SRGB (CIE1931 area percentage/overlap) | 146.2%,100% |
| | Adobe RGB (CIE1976 area percentage/overlap) | 118.4%,97.5% |
| | Adobe RGB (CIE1931 area percentage/overlap) | 108.4%,94% |
| | DCI-P3 (CIE1976 area percentage/overlap) | 110.1%,99% |
| | DCI-P3 (CIE1931 area percentage/overlap) | 107.8%,98.4% |
| | Rec.709 (CIE1976 area percentage/overlap) | 138.2%,100% |
| | Rec.709 (CIE1931 area percentage/overlap) | 146.2%,100% |
| | Rec.2020 (CIE1976 area percentage/overlap) | 80.2%,80.2% |
| | Rec.2020 (CIE1931 area percentage/overlap) | 77.3%,77.3% |
| I/O Ports | Surface Treatment | Anti-Reflection |
| | Display Colors | 1.07B |
| | Color bit | 10 bits |
| | USB Type C (DisplayPort Alternate) | 1 |
| | Headphone-out | 1 |
| | USB 3.2 Gen 1 Type A | 2 |
| | USB 3.2 Gen 1 Type B | 1 |
| | Lock type | Kensington Lock |
| | HDMI | 2 |
| | HDMI version | 2.1 |
| Power | HDMI HDCP version | 2.3 |
| | DisplayPort | 1 |
| | DisplayPort version | 2.1a |
| | DisplayPort HDCP version | 2.3 |
| | Warranty | 36M |
| | Power Type | Internal Power Board |
| | Power Input | 100~240V, 50/60Hz |
| | On-mode Power Consumption (KWh/1000h) | TBD |
| | Annual Energy Consumption (KWh) | TBD |
| | Standby-mode Power Consumption (W) | 0.5 |
| | Off-mode Power Consumption (W) | 0.3 |
| | Energy Efficiency Rating | TBD |
| | Power Cord Type | C13 |



MÀN HÌNH

MPG 272URX QD-OLED

MPG 272URX QD-OLED

| | | |
|------------------------------|--|------------------|
| In The Box | DisplayPort Cable | 1 |
| | HDMI Cable | 1 |
| | DVI Cable | 0 |
| | USB Type A to Type B Cable | 1 |
| | USB Type C to Type A Cable | 0 |
| | USB Type C to Type C Cable | 0 |
| | Thunderbolt Cable | 0 |
| | VGA Cable | 0 |
| | 3.5mm audio Cable | 0 |
| | 3.5mm combo audio Cable | 0 |
| | 3.5mm Mic Cable | 0 |
| | Power Cord | 1 |
| | AC Adaptor | 0 |
| | Quick Guide | 1 |
| | Warranty Card | 0 |
| | Mouse Bungee Unit | 0 |
| | | |
| Design | Adjustment (Tilt) | -5° ~ 15° |
| | Adjustment (Swivel) | -30° ~ 30° |
| | Adjustment (Height) | 0 ~ 110 mm |
| | Adjustment (Pivot) | -90° ~ 90° |
| | VESA Mounting | 100x100mm |
| Dimension & Weight (product) | Product Dimension with Stand (WxDxH) (mm) | 610 x 242 x 422 |
| | Product Dimension without Stand (WxDxH) (mm) | 610 x 69 x 356 |
| | Stand Dimension (WxDxH) (mm) | 309 x 242 x 391 |
| | Weight (Net kg) | N/A |
| | Weight Without Stand (kg) | N/A |
| Dimension & Weight (box) | Inside Carton Dimension (WxDxH) (cm) | 81 x 18.5 x 50 |
| | Outer Carton Dimension (WxDxH) (cm) | 82.8 x 20 x 52.5 |
| | Weight (Gross kg) | N/A |
| Barcode Info | EAN | 4711377275460 |