

SPECIFICATIONS

| | |
|-------------------|---|
| Model Name | B760M BOMBER WIFI |
| CPU Support | Supports 12 th / 13 th Gen Intel® Core™ Processors, Pentium® Gold and Celeron® Processors |
| CPU Socket | LGA 1700 |
| Chipset | Intel® B760 Chipset |
| Expansion Slots | 1x PCIe 4.0 x16 slot 1x PCIe 4.0 x1 slot |
| Display Interface | Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4, VGA - Requires Processor Graphics |
| Memory Support | 2 DIMMs, Dual Channel DDR5-6400+MHz(OC) |
| Storage | 2x M.2 Gen4 x4 64Gbps slots, 4x SATA 6Gbps ports |
| USB ports | 6x USB 3.2 Gen 1 5Gbps (6 Type-A), 6x USB 2.0 |
| LAN | Realtek® RTL8125B 2.5G LAN |
| WiFi / BT | Intel® Wi-Fi 6E, Bluetooth 5.3 |
| Audio | 8-Channel (7.1) HD Audio with Audio Boost |

FEATURES



Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.



Wi-Fi 6E

The latest wireless solution supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



PCI-E Steel Armor

Protecting VGA cards against bending and EMI.



EZ Debug LED

Easiest way to troubleshoot.



Frozr AI Cooling

Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.



Memory Boost


Advanced technology to deliver pure data signals for the best performance, stability and compatibility.



Audio Boost

Reward your ears with studio grade sound quality for the most immersive audio experience.

CONNECTIONS

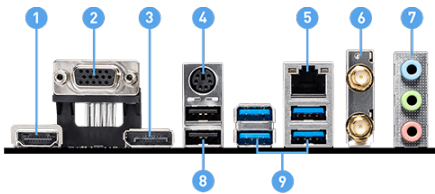

- | | |
|-------------------------------|----------------------|
| 1. HDMI™ | 2. VGA |
| 3. DisplayPort | 4. Keyboard / Mouse |
| 5. LAN port | 6. Wi-Fi / Bluetooth |
| 7. Audio Connectors | 8. USB 2.0 |
| 9. USB 3.2 Gen 1 5Gbps Type-A | |