



SPECIFICATIONS

| | |
|--------------------------|---|
| Model Name | B850M GAMING PLUS WIFI6E |
| CPU Support | Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors |
| CPU Socket | AMD Socket AM5 |
| Chipset | AMD B850 Chipset |
| Expansion slots | 1 x PCIe 4.0 x16 slot, 2 x PCIe 3.0 x1 slots |
| Display Interface | Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 - Requires Processor Graphics |
| Memory Support | 4 DIMMs, Dual Channel DDR5 - 8200+ MT/s (OC) |
| Storage | 1 x M.2 Gen5 x4 128Gbps slot, 1 x M.2 Gen4 x4 64Gbps slot, 4 x SATA 6Gbps ports |
| USB ports | 5 x USB 10Gbps (3 Type-A + 2 Type-C), 6 x USB 5Gbps (6 Type-A), 4 x USB 2.0 |
| LAN | Realtek® 2.5Gbps LAN |
| WIFI / BT | Wi-Fi 6E Solution, Bluetooth 5.3 |
| Audio | 8-Channel (7.1) HD Audio with Audio Boost |

FEATURES



5G Network Solution

Featuring premium 5G LAN to deliver better network experience.



Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.



Wi-Fi 6E

The latest wireless solution supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



2.5G Network Solution

Featuring premium 2.5G LAN to deliver better network experience.



Dual M.2 Connectors

Onboard 2x M.2 Connectors with one PCIe 5.0 solution, strengthened by M.2 Shield Frozr.



Core Boost

With premium layout and fully digital power design to support more cores and provide better performance.



Extended Heatsink Design

MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.



M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.



Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



EZ Antenna


EZ Antenna makes the process effortless by simply attaching fasteners to the motherboard without rotation.



Audio Boost

Reward your ears with studio grade sound quality for the most immersive audio experience.

CONNECTIONS

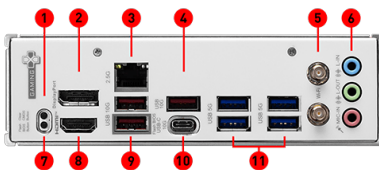

1. Clear CMOS Button
2. DisplayPort 1.4
3. 2.5G LAN
4. USB 10Gbps (Type-A)
5. Wi-Fi / Bluetooth
6. HD Audio Connectors
7. Flash BIOS Button
8. HDMI™ 2.1 Port
9. USB 10Gbps (Type-A)
10. USB 10Gbps (Type-C)
11. USB 5Gbps (Type-A)