CARTES MÈRES

MEG X299 CREATION

UNE CARTE D'EXCEPTION



SPECIFICATIONS

Model Name	MEG X299 CREATION
CPU Support	Supports Intel® X-series Processors Family
CPU Socket	LGA 2066
Chipset	Intel® X299 Chipset
Graphics Interface	4 x PCI-E 3.0 x16 slots Support 4-way NVIDIA® SLI™ / 4-way AMD® CrossFire™
Memory Support	8 DIMMs, Quad Channel Max Frequency DDR4-4200+(OC)
Expansion Slots	1 x PCI-E x1 slot
Storage	3 x Turbo M.2 slots, 1 x Turbo U.2 8 x SATA 6Gb/s
USB Ports	3 x USB 3.1 Gen 2 (Type A+C) 10 x USB 3.1 Gen 1 6 x USB 2.0
LAN	Realtek RTL8125-CG 2.5G LAN + Intel® I219v Gigabit LAN
Wireless / BT	Intel® WIFI AC 9260
Audio	8-Channel (7.1) HD Audio with Audio Boost 4
Form Factor	E-ATX

FEATURES

DDR4 Boost with Steel Armor

Fully isolated and shielded DIMM slots to deliver pure data signals for the best gaming performance and stability.

Core Boost

Circuit repensé et alimentation numérique pour supporter plus de cœurs et assurer de meilleures performances.

BIOS Flashback+

Utilisez une clé USB pour flasher n'importe quel BIOS en quelques secondes, sans avoir à installer de processeur, de mémoire ou de carte graphique.

BIOS Flashback+

Utilisez une clé USB pour flasher n'importe quel BIOS en quelques secondes, sans avoir à installer de processeur, de mémoire ou de carte graphique.

Trois slots Turbo M.2

Ces slots PCIe Gen3 x4 assurent des performances élevées aux SSD NVMe.

M.2 Shield Frozr

La solution M.2 Shield Frozr intégrée est pensée pour garder les SSD M.2 à bonne température et empêcher le phénomène de throttling.


Mystic Light RGB LED

Personalize your PC with 16.8 million colors / 29 effects, controlled in one click!

Trois connecteurs d'alimentation à 8 broches

Les trois connecteurs d'alimentation à 8 broches assurent une alimentation adaptées aux processeurs multicœurs les plus performants.

CONNECTIONS

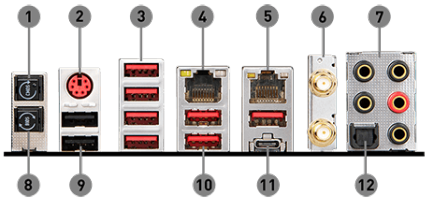

1. Clear CMOS Button
2. PS/2 Port
3. USB 3.1 Gen1 Ports
4. 2.5G LAN Port
5. Intel® LAN Ports
6. Intel® WiFi/ Bluetooth Module
7. HD Audio Connectors
8. Flash BIOS Button
9. USB 2.0 Ports
10. USB 3.1 Gen1 Ports
11. Lightning USB 3.1 Gen 2 Type A + C
12. Optical S/PDIF-Out

Generated 2020-12-09, check for the latest version www.msi.com/datasheet. The information provided in this document is intended for informational purposes only and is subject to change without notice.

TRUE GAMING © 2020 Micro-Star Int'l Co.Ltd. MSI is a registered trademark of Micro-Star Int'l Co.Ltd. All rights reserved.