




SPECIFICATIONS

| | |
|--------------------------|--|
| Model Name | PRO A620AM-G EVO WIFI |
| CPU Support | Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors |
| CPU Socket | AMD Socket AM5 |
| Chipset | AMD A620A Chipset |
| Expansion Slots | 1 x PCIe 4.0 x16 slot 1 x PCIe 3.0 x1 slot |
| Display Interface | Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 – Requires Processor Graphics |
| Memory Support | 2 DIMMs, Dual Channel DDR5 - 6800+ MT/s (OC) |
| Storage | 2 x M.2 Gen4 x4 64Gbps slots 4 x SATA 6Gbps ports |
| USB ports | 7 x USB 5Gbps (6 Type-A + 1 Type-C) 6 x USB 2.0 |
| LAN | Realtek® 8125D 2.5G LAN |
| WIFI / BT | Wi-Fi 6E module, Bluetooth 5.3 |
| Audio | 8-Channel (7.1) HD Audio with Audio Boost |

FEATURES

- Latest DDR5 Memory**
 A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.
- Lightning Gen4 Solution**
 The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.
- 2.5G Network Solution**
 Featuring premium 2.5G LAN to deliver better network experience.
- Wi-Fi 6E**
 Supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.
- Frozr AI Cooling**
 Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.
- EZ Debug LED**
 Easiest way to troubleshoot.
- Memory Boost**
 Advanced technology to deliver pure data signals for the best performance, stability and compatibility.
- Core Boost**
 With premium layout and fully digital power design to support more cores and provide better performance.
- Audio Boost**
 Reward your ears with studio grade sound quality for the most immersive audio experience.

CONNECTIONS

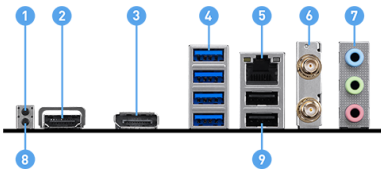

1. Clear CMOS Button
2. HDMI™
3. DisplayPort
4. USB 5Gbps Type-A
5. 2.5G LAN
6. Wi-Fi / Bluetooth
7. Audio connectors
8. Flash BIOS Button
9. USB 2.0