



SPECIFICATIONS

Model Name	B850M GAMING PLUS WIFI6E
CPU Support	Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors
CPU Socket	AMD Socket AM5
Chipset	AMD B850 Chipset
Expansion slots	1 x PCIe 4.0 x16 slot, 2 x PCIe 3.0 x1 slots
Display Interface	Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 – Requires Processor Graphics
Memory Support	4 DIMMs, Dual Channel DDR5 - 8200+ MT/s (OC)
Storage	1 x M.2 Gen5 x4 128Gbps slot, 1 x M.2 Gen4 x4 64Gbps slot, 4 x SATA 6Gbps ports
USB ports	5 x USB 10Gbps (3 Type-A + 2 Type-C), 6 x USB 5Gbps (6 Type-A), 4 x USB 2.0
LAN	Realtek® 2.5Gbps LAN
WIFI / BT	Wi-Fi 6E Solution, Bluetooth 5.3
Audio	8-Channel (7.1) HD Audio with Audio Boost

FEATURES



Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.



Wi-Fi 6E

The latest wireless solution supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



2.5G Network Solution

Featuring premium 2.5G LAN to deliver better network experience.



Dual M.2 Connectors

Onboard 2x M.2 Connectors with one PCIe 5.0 solution, strengthened by M.2 Shield Frozr.



Core Boost

With premium layout and fully digital power design to support more cores and provide better performance.



M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.



Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



EZ Antenna


EZ Antenna makes the process effortless by simply attaching fasteners to the motherboard without rotation.



Audio Boost

Reward your ears with studio grade sound quality for the most immersive audio experience.

CONNECTIONS

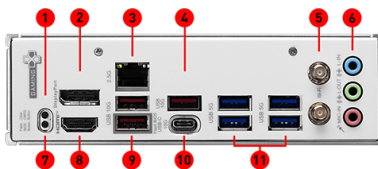

1. Clear CMOS Button
2. DisplayPort 1.4
3. 2.5G LAN
4. USB 10Gbps (Type-A)
5. Wi-Fi / Bluetooth
6. HD Audio Connectors
7. Flash BIOS Button
8. HDMI™ 2.1 Port
9. USB 10Gbps (Type-A)
10. USB 10Gbps (Type-C)
11. USB 5Gbps (Type-A)