



## SPECIFICATIONS

<b>Model Name</b>	PRESTIGE X570 CREATION
<b>CPU Support</b>	Supports 2nd and 3rd Gen AMD Ryzen™ / Ryzen™ with Radeon™ Vega Graphics and 2nd Gen AMD Ryzen™ with Radeon™ Graphics Desktop Processors
<b>CPU Socket</b>	AM4
<b>Chipset</b>	AMD® X570 Chipset
<b>Graphics</b>	3 x PCI-E 4.0 x16 slots
<b>Interface</b>	Support 2-way SLI / 3-way CrossFire™
<b>Memory Support</b>	4 DIMMs, Dual Channel DDR4
<b>Expansion Slots</b>	4 x PCI-E 2.0 x1 slots
<b>Storage</b>	6 x SATA 6Gb/s ports 2 x Lightning M.2 Gen4 slots
<b>USB Ports</b>	3 x USB 3.2 (Gen2) + 14 x USB 3.2 (Gen1) + 6 x USB 2.0
<b>LAN</b>	Aquantia AQC107 (10GbE) + Intel® I211AT Gigabit LAN
<b>Wireless / BT</b>	Intel® Wi-Fi 6 AX200
<b>Audio</b>	8-Channel (7.1) HD Audio with Audio Boost 4

## FEATURES



### WIFI 6

The latest wireless solution supports MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



### Frozr Heatsink Design

Designed with the patented fan and double ball bearings to provide best performance for enthusiast gamers and prosumers.



### Extended Heat-Pipe Design

Enlarge the surface of heat dissipation, connecting from MOS heatsink to chipset heatsink.



### Creator Center

An optimized software with various system modes and resources for a wide range of scenarios and needs.



### Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



### M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.



### Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



### 10G Super LAN


Next level network speed, secure networking with fastest data throughput to improve efficiency.



### Extended Heatsink Design

MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.

## CONNECTIONS

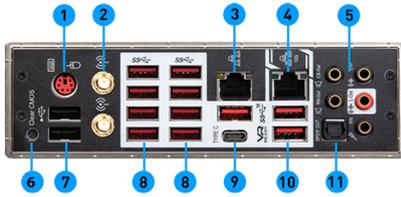

- |                          |                         |
|--------------------------|-------------------------|
| 1. PS/2 Combo Port       | 2. Intel Wi-Fi 6        |
| 3. LAN Port              | 4. 10G LAN Port         |
| 5. HD Audio Connectors   | 6. Clear CMOS Button    |
| 7. USB 2.0 Ports         | 8. USB 3.2 Gen1 Ports   |
| 9. USB 3.2 Gen2 Type-A+C | 10. USB 3.2 Gen1 Type-A |
| 11. Optical S/PDIF OUT   |                         |