MOTHERBOARD

MEG X570 ACE

ACE YOUR ENEMY



SPECIFICATIONS

Model Name	MEG X570 ACE
CPU Support	Supports 2nd and 3rd Gen AMD Ryzen™ / Ryzen™ with Radeon™ Vega Graphics and 2nd Gen AMD Ryzen™ with Radeon™ Graphics Desktop Processors
CPU Socket	Socket AM4
Chipset	AMD® X570 Chipset
Graphics Interface	3 x PCI-E 4.0 x16 slots Supports 2-way SLI / 3-way CrossFire
Memory Support	4 DIMMs, Dual Channel DDR4-4533+(OC)
Storage	3 x Lightning Gen 4 M.2 slots 4 x SATA 6Gb/s ports
USB Ports	5 x USB 3.2 (Gen2, 3A+2C) + 6 x USB 3.2 (Gen1) + 6 x USB 2.0
LAN	Realtek8125-CG 2.5G LAN, Intel® I211AT Gigabit LAN
Wi-Fi / BT	Intel® Wi-Fi 6 AX200
Audio	8-Channel (7.1) HD Audio with Audio Boost HD

FEATURES

Mystic Light Infinity

Personalize your PC with 16.8 million colors / 29 effects with MSI Mystic Light APP, making your system come alive with infinity.

Frozr Heatsink Design

Designed with the patented fan and double ball bearings to provide best performance for enthusiast gamers and prosumers.

Extended Heat-Pipe Design

Enlarge the surface of heat dissipation, connecting from MOS heatsink to chipset heatsink.

WIFI 6

The latest wireless solution supports MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.

Pre-installed I/O Shielding

Better EMI protection and more convenience for installation

Game Boost

One second automated overclocking. Turn the dial and your PC gets another adrenalin shot.

Audio Boost HD

Isolated audio with a high quality audio processor with ESS DAC & Nahimic for the most immersive gaming experience.

M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.


Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.

Core Boost

With premium layout and fully digital power design to support more cores and provide better performance.

CONNECTIONS

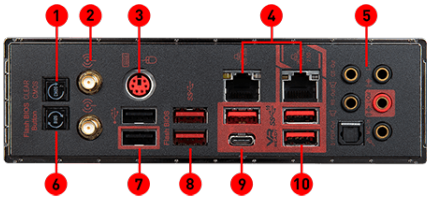

1. Clear CMOS Button
2. Wi-Fi /Bluetooth Antenna Connectors
3. PS/2 GAMING Device Port
4. REALTEK 2.5G + Intel Gigabit LAN
5. HD Audio Connectors
6. Flash BIOS Button
7. USB 2.0 Ports
8. USB 3.2 Gen1 Ports
9. USB 3.2 Gen2 Ports Type A+C
10. USB 3.2 Gen2 Ports

Generated 2022-10-24, check for the latest version www.msi.com/datasheet. The information provided in this document is intended for informational purposes only and is subject to change without notice.

© 2022 Micro-Star Int'l Co.Ltd. MSI is a registered trademark of Micro-Star Int'l Co.Ltd. All rights reserved.