




## SPECIFICATIONS

<b>Model Name</b>	B850M GAMING WIFI6E
<b>CPU Support</b>	Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors
<b>CPU Socket</b>	AMD Socket AM5
<b>Chipset</b>	AMD B850 Chipset
<b>Expansion slots</b>	1 x PCIe 4.0 x16 slot, 1 x PCIe 3.0 x1 slot
<b>Display Interface</b>	Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 - Requires Processor Graphics
<b>Memory Support</b>	2 DIMMs, Dual Channel DDR5 - 8200+ MT/s (OC)
<b>Storage</b>	1 x M.2 Gen5 x4 128Gbps slot, 1 x M.2 Gen4 x4 64Gbps slot, 4 x SATA 6Gbps ports
<b>USB ports</b>	1 x USB 10Gbps (1 Type-C) 6 x USB 5Gbps (1 Type-C + 5 Type-A) 6 x USB 2.0
<b>LAN</b>	Realtek® 8125 2.5G LAN
<b>WIFI / BT</b>	Wi-Fi 6E module, Bluetooth 5.3
<b>Audio</b>	8-Channel (7.1) HD Audio with Audio Boost

## FEATURES

- 5G Network Solution**  
 Featuring premium 5G LAN to deliver better network experience.
- 64MB BIOS**  
 A larger BIOS ROM capacity allows the motherboard to support next-level CPU upgrades with better compatibility.
- Lightning Gen 5 Solution**  
 The latest Gen 5 M.2 solution with up to 128GB/s bandwidth for maximum transfer speed.
- Extended Heatsink Design**  
 MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.
- M.2 Shield FROZR**  
 Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.
- EZ PCIe Clip II**  
 Allows for easy removal of the graphics card by pressing the tail-like lock with one finger, even in the cramped case spaces.
- EZ Antenna**  
 EZ Antenna makes the process effortless by simply attaching fasteners to the motherboard without rotation.
- PCI-E Steel Armor**  
 Protecting VGA cards against bending and EMI.
- Wi-Fi 6E**  
 Supports 6GHz spectrum, MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.
- 2.5G Network Solution**  
 Featuring premium 2.5G LAN to deliver better network experience.
- Audio Boost**  
 Reward your ears with studio grade sound quality for the most immersive audio experience.

## CONNECTIONS

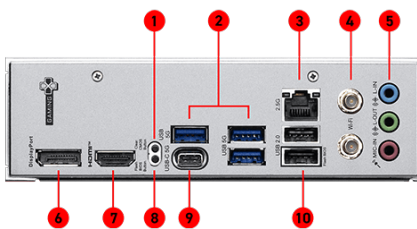

1. Clear CMOS Button
2. USB 5Gbps (Type-A)
3. 2.5G LAN
4. Wi-Fi / Bluetooth
5. Audio Connectors
6. Display Port
7. HDMI™
8. Flash BIOS Button
9. USB 5Gbps (Type-C)
10. USB 2.0