



msi

PLACAS MADRE

Creator X299

CREATE YOUR MASTERPIECE




FEATURES

SPECIFICATIONS

| | |
|---------------------------|--|
| Model Name | Creator X299 |
| CPU Support | Supports Intel® Core™ X-Series Processor 10000/9000/78xx(above)series for LGA2066 Socket |
| CPU Socket | LGA 2066 |
| Chipset | Intel® X299 Chipset |
| Graphics Interface | 4 x PCI-E 3.0 x16 slots 4-way AMD® CrossFire™ Support 4-way NVIDIA® SLI™ |
| Memory Support | 8 DIMMs, Quad Channel, DDR4-4266MHz (OC) |
| Storage | 3 x Turbo M.2 slots 32Gb/s, supports Intel® Optane™ Technology 1 x U.2 slot 32Gb/s 8 x SATA 6Gb/s |
| USB Ports | 1 x USB 3.2 (Gen2 x2, 20G, Type-C) + 1 x USB 3.2 Gen2 (Type-C) + 11 x USB 3.2 (Gen1, Type-A) + 6 x USB 2.0 |
| LAN | Aquantia AQC107 10G LAN + Intel® I219v Gigabit LAN |
| Wireless / BT | Intel® Wi-Fi 6 AX200, Bluetooth 5.1 |
| Audio | 8-Channel (7.1) HD Audio with Audio Boost 4 |

CONNECTIONS

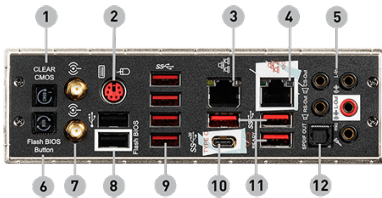

- | | |
|-------------------------|-------------------------------|
| 1. Clear CMOS Button | 2. Keyboard / Mouse |
| 3. Gigabit LAN | 4. 10G LAN |
| 5. Audio Connectors | 6. Flash BIOS Button |
| 7. Wireless / Bluetooth | 8. USB 2.0 |
| 9. USB 3.2 Gen1 Type-A | 10. USB 3.2 Gen2x2 20G Type-C |
| 11. USB 3.2 Gen1 Type-A | 12. Optical S/PDIF out |

Generated 2020-12-09, check for the latest version www.msi.com/datasheet. The information provided in this document is intended for informational purposes only and is subject to change without notice.