



SPECIFICATIONS

| | |
|------------------------|---|
| Model Name | PRESTIGE X570 CREATION |
| CPU Support | Supports 2nd and 3rd Gen AMD Ryzen™ / Ryzen™ with Radeon™ Vega Graphics and 2nd Gen AMD Ryzen™ with Radeon™ Graphics Desktop Processors |
| CPU Socket | AM4 |
| Chipset | AMD® X570 Chipset |
| Graphics | 3 x PCI-E 4.0 x16 slots |
| Interface | Support 2-way SLI / 3-way CrossFire™ |
| Memory Support | 4 DIMMs, Dual Channel DDR4 |
| Expansion Slots | 4 x PCI-E 2.0 x1 slots |
| Storage | 6 x SATA 6Gb/s ports 2 x Lightning M.2 Gen4 slots |
| USB Ports | 3 x USB 3.2 (Gen2) + 14 x USB 3.2 (Gen1) + 6 x USB 2.0 |
| LAN | Aquantia AQC107 (10GbE) + Intel® I211AT Gigabit LAN |
| Wireless / BT | Intel® Wi-Fi 6 AX200 |
| Audio | 8-Channel (7.1) HD Audio with Audio Boost 4 |

FEATURES



WIFI 6

The latest wireless solution supports MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.



Frozr Heatsink Design

Designed with the patented fan and double ball bearings to provide best performance for enthusiast gamers and prosumers.



Extended Heat-Pipe Design

Enlarge the surface of heat dissipation, connecting from MOS heatsink to chipset heatsink.



Creator Center

An optimized software with various system modes and resources for a wide range of scenarios and needs.



Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.



Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



10G Super LAN


Next level network speed, secure networking with fastest data throughput to improve efficiency.



Extended Heatsink Design

MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.

CONNECTIONS

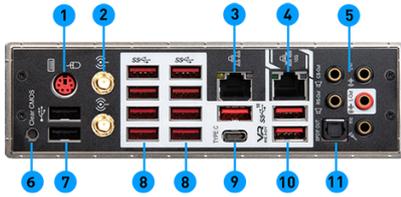

- | | |
|--------------------------|-------------------------|
| 1. PS/2 Combo Port | 2. Intel Wi-Fi 6 |
| 3. LAN Port | 4. 10G LAN Port |
| 5. HD Audio Connectors | 6. Clear CMOS Button |
| 7. USB 2.0 Ports | 8. USB 3.2 Gen1 Ports |
| 9. USB 3.2 Gen2 Type-A+C | 10. USB 3.2 Gen1 Type-A |
| 11. Optical S/PDIF OUT | |