












SPECIFICATIONS

| | |
|--------------------------|---|
| Model Name | MPG X570 GAMING PLUS |
| CPU Support | Supports 2nd and 3rd Gen AMD Ryzen™ / Ryzen™ with Radeon™ Vega Graphics and 2nd Gen AMD Ryzen™ with Radeon™ Graphics Desktop Processors |
| CPU Socket | Socket AM4 |
| Chipset | AMD® X570 Chipset |
| Graphics | 2 x PCI-E 4.0 x16 slots |
| Interface | Supports 2-Way AMD® CrossFire™ Technology |
| Display Interface | HDMI™ - Requires Processor Graphics |
| Memory Support | 4 DIMMs, Dual Channel DDR4-4400(OC) |
| Expansion Slots | 3x PCIe 3.0 x1 slots |
| Storage | 1 x Lightning M.2 slot (Gen4 x4) + 1 x Turbo M.2 slot (Gen3 x4) 6 x SATA 6Gb/s |
| USB Ports | 2 x USB 3.2 (Gen2, A+C) + 8 x USB 3.2 (Gen1) + 6 x USB 2.0 |
| LAN | Realtek® RTL8111H Gigabit LAN |
| Audio | 8-Channel(7.1) HD Audio with Audio Boost 4 |

FEATURES

- 
Frozr Heatsink Design
 Designed with the patented fan and double ball bearings to provide best performance for enthusiast gamers and prosumers.
- 
Audio Boost 4
 Isolated audio with a high quality audio processor for the most immersive gaming experience.
- 
Flash BIOS Button
 Simply use a USB key to flash any BIOS within seconds, without installing a CPU, memory or graphics card.
- 
Lightning Gen4 Solution
 The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.
- 
Core Boost
 With premium layout and fully digital power design to support more cores and provide better performance.
- 
M.2 Shield FROZR
 M.2 thermal accessory keeps M.2 SSDs safe while preventing throttling, making them run faster.
- 
Extended Heatsink Design
 MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.
- 
DDR4 Boost
 Advanced technology to deliver pure data signals for the best gaming performance and stability.

CONNECTIONS

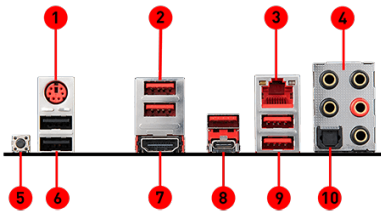

- | | |
|------------------------|----------------------------|
| 1. Keyboard / Mouse | 2. USB 3.2 Gen1 Type-A |
| 3. LAN | 4. Audio Connectors |
| 5. Flash BIOS Button | 6. USB 2.0 |
| 7. HDMI™ | 8. USB 3.2 Gen2 Type-A + C |
| 9. USB 3.2 Gen1 Type-A | 10. Optical S/PDIF out |