




## FEATURES

## SPECIFICATIONS

|                           |  |
|---------------------------|--|
| <b>Model Name</b>         | MEG Z390 ACE   |
| <b>CPU Support</b>        | Supports 9 <sup>th</sup> / 8 <sup>th</sup> Gen Intel® Core™ / Pentium® Gold / Celeron® processors        |
| <b>CPU Socket</b>         | LGA 1151   |
| <b>Chipset</b>            | Intel® Z390 Chipset  |
| <b>Graphics Interface</b> | 3 x PCI-E 3.0 x16 slots<br>Support 2-way NVIDIA® SLI™ Technology and<br>3-way AMD® CrossFire™ Technology |
| <b>Memory Support</b>     | 4 DIMMs, Dual Channel DDR4-4500(OC)  |
| <b>Expansion Slots</b>    | 3 x PCI-E x1 slots   |
| <b>Storage</b>            | 3 x Turbo M.2 slots (Intel® Optane™ Memory Ready)<br>6 x SATA 6Gb/s                                      |
| <b>USB Ports</b>          | 8 x USB 3.1 (Gen2, A+C) + 4 x USB 3.1 (Gen1) + 8 x USB 2.0   |
| <b>LAN</b>                | Killer™ E2500 Gigabit Ethernet   |
| <b>Wireless / BT</b>      | Intel® Wireless-AC 9560 (1.73Gbps)   |
| <b>Audio</b>              | 8-Channel (7.1) HD Audio with AUDIO BOOST HD   |
| <b>Form Factor</b>        | ATX  |

## CONNECTIONS

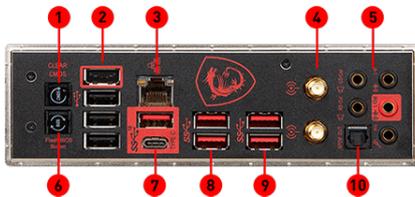

- |                                |  |
|--------------------------------|--|
| 1. Clear CMOS Button           | 2. USB 2.0 Ports                       |
| 3. Killer™ E2500 Gigabit LAN   | 4. Wi-Fi /Bluetooth Antenna Connectors |
| 5. HD Audio Connectors         | 6. Flash BIOS Button                   |
| 7. USB 3.1 Gen2 Ports Type A+C | 8. USB 3.1 Gen2 Ports                  |
| 9. USB 3.1 Gen2 Ports          | 10. Optical S/PDIF-Out                 |