

Recovery CD SOP for MSI 110W (EQUIPMENTS NEEDED)



Item 1:
USB Hub

Note:
USB Hub is a must because MSI 110W only has 1 main USB port.



Item 2:
External ODD in USB

Note:
Some of the external ODDs may need external power source (using its own power adapter). Make sure that the external ODD is properly set-up. There are some instances wherein system cannot read the data inside the ODD due lack of power.



Item 3:
External Keyboard in USB

Note:
You will need this during bios boot up, so this is a must.


Note: External USB mouse is optional since you can directly use U110W Smart Tracker →



Recovery CD SOP for MSI 110W (SET-UP)



Recovery CD SOP for MSI 110W (Step-by-Step PROCEDURES)

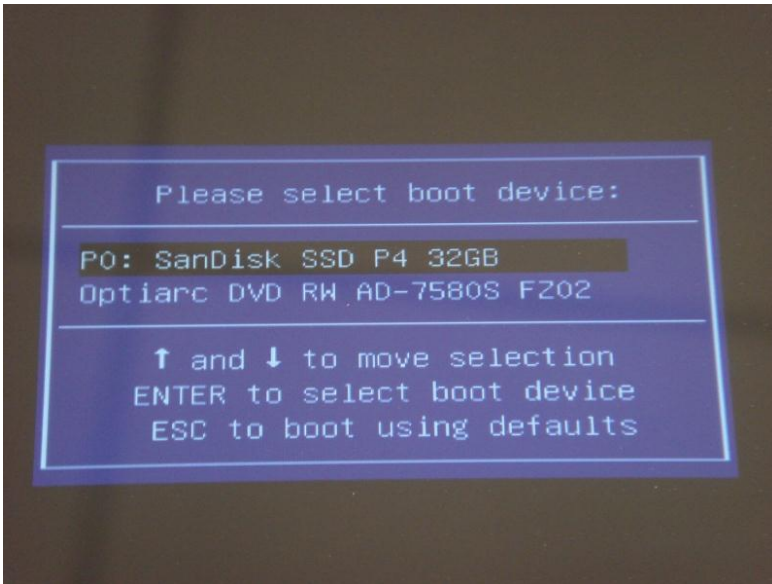


Note:

Assuming that all devices are all already set-up and important files are backed up before performing the recovery process.

Step 1:

During system boot up, press the function key F11 continuously until Boot device screen menu prompts you. Select the external ODD name. In my case, I'll go for Optiarc DVD RW AD-7580S FZ02.. Press enter to boot from external ODD.

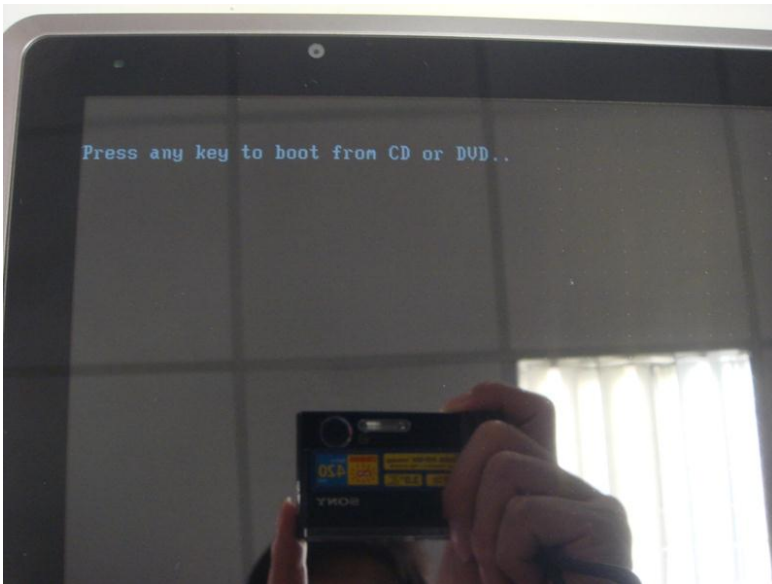

Step 2:

Press any key to boot from CD or DVD



Step 3:

Wait until the system finished loading files...




Step 4:

Select "HARD DISK RECOVERY"


Note:

Choosing "System Partition Recovery" Will just do the same since the SSD set up is only done in one drive (C:)

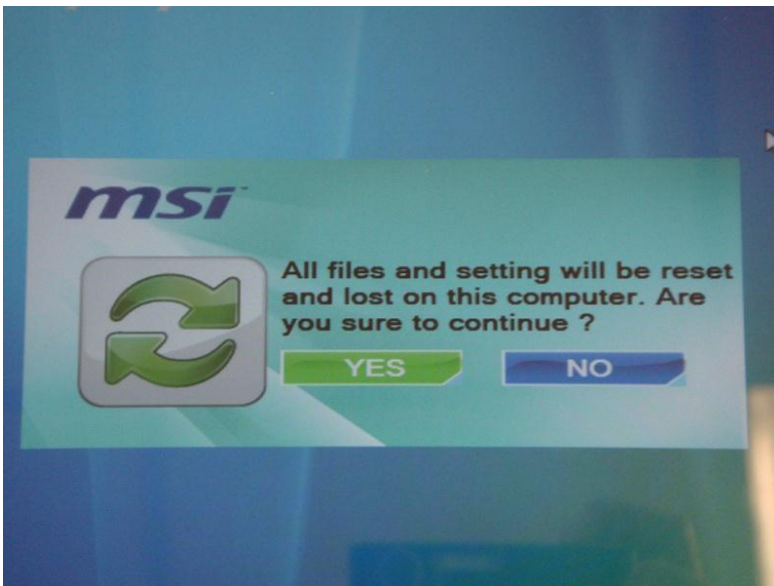


Step 5:

Select "YES" to continue....

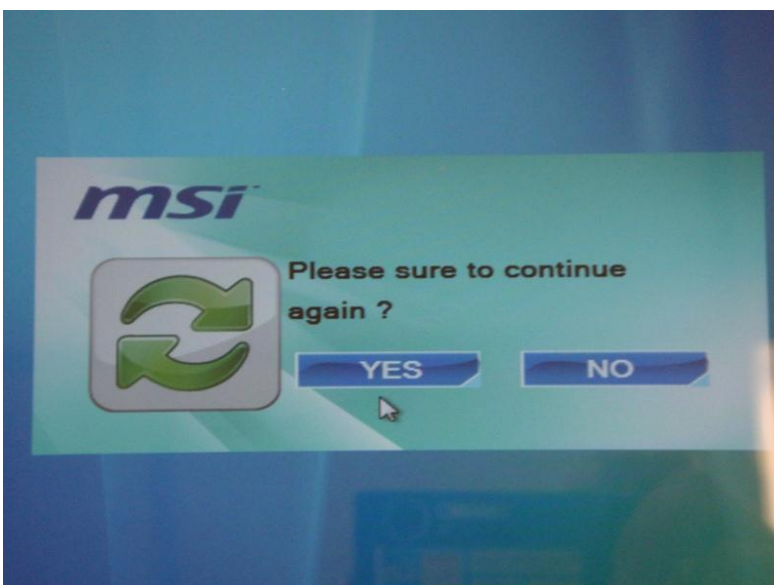


Step 6:

Select "YES" to continue.....

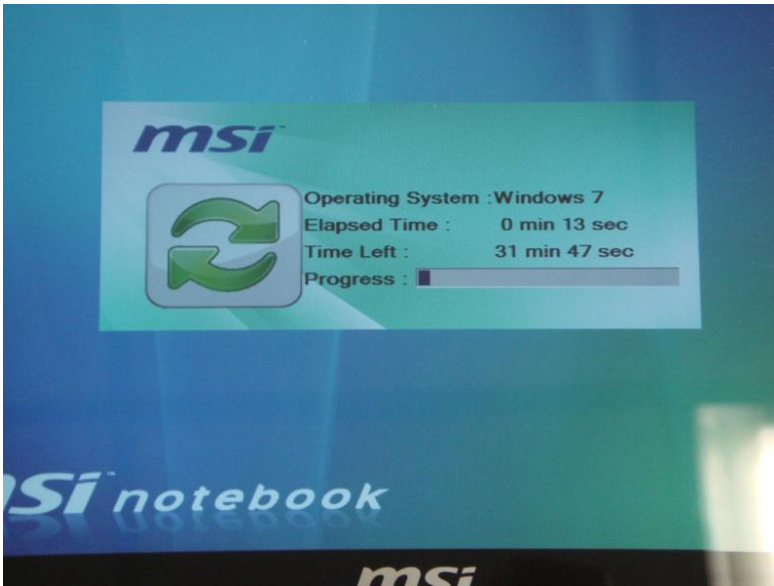


Step 7:

The recovery process will take roughly 32 minutes to finish. Get Recovery Disc 2 ready at your side.

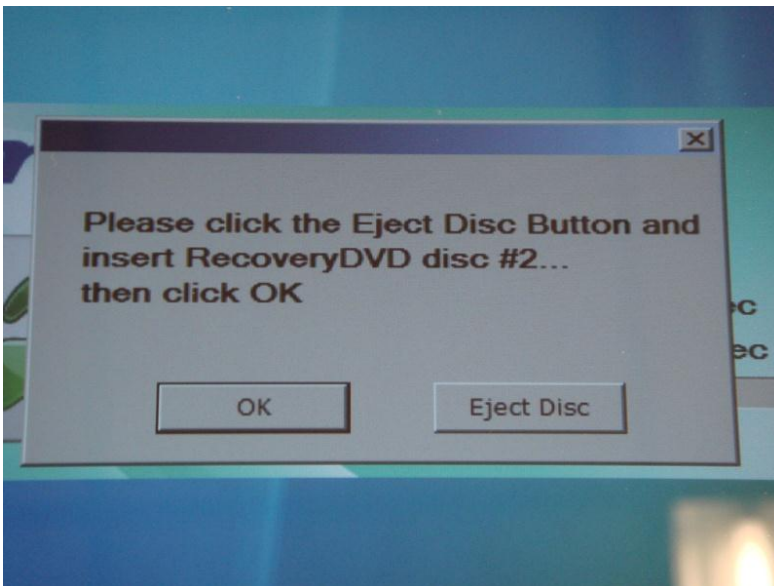

Step 8:

When prompted with the screen shown, eject Disc 1 and then insert Disc 2. Then press "OK"

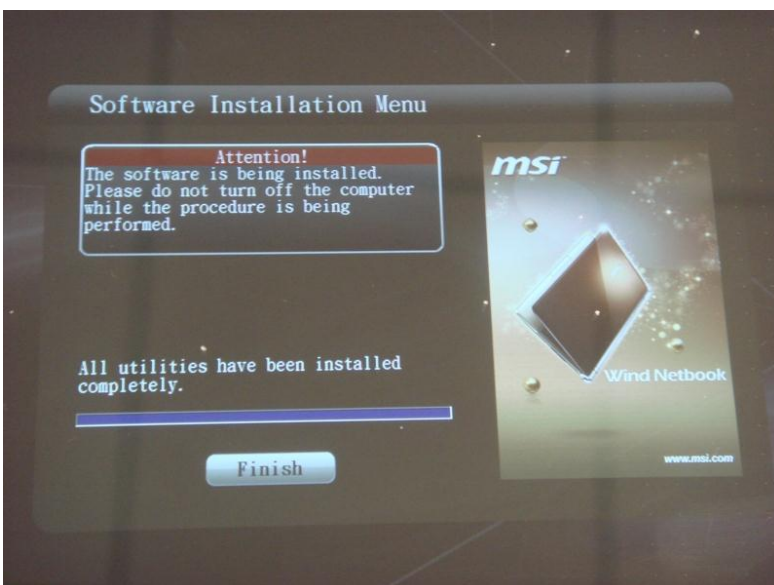

Step 9:

After the recovery process is done, system will automatically reboot to enter OOB (this is where you input your desired user name, time zone and etc. ; afterwards, you will be asked to select and install utility/software you needed. When it's done, click finish and your system is now ready.