

BEYOND THE NORM, MEET GODLIKE


Whether it's record-breaking overclocking, ultra-customization of ARGB lighting with touch control LCD, or simply the desire to build the most powerful system imaginable, the MEG Z890 GODLIKE E-ATX motherboard is ready for every challenge.



Picture and logos


SELLING POINTS

- Compatible con procesadores Intel® Core™ Ultra (Serie 2) para el socket LGA 1851
- Compatible con memoria DDR5, canal dual DDR5 9200+ MT/s (OC)
- Dynamic Dashboard III: Una pantalla LCD de 3.99 pulgadas para monitoreo en tiempo real del hardware, resolución de problemas, actualizaciones de BIOS y opciones de visualización personalizadas, mejorando la experiencia del usuario
- M.2 XPANDER-Z SLIDER GEN5: La tarjeta de expansión M.2 de un solo slot cuenta con dos ranuras Gen5 M.2 de alta velocidad, y el diseño EZ Slide facilita las actualizaciones de SSD
- THUNDERBOLTM5: La tarjeta accesoria Thunderbolt 5 incluye dos puertos Thunderbolt 5, ofreciendo hasta 160Gbps de ancho de banda total y hasta 27W de carga rápida para dispositivos
- Rendimiento ultra: Sistema de energía de riel dual 26+2+1+1, SPS de 110A, OC Engine, conectores de alimentación de CPU de 8 pines dobles, Core Boost, Memory Boost, PCB de 10 capas hecho con cobre de 2oz espesado y material de nivel grado servidor
- Frozr Guard: Diseño de aletas onduladas, tubo de calor transversal de contacto directo, placa base MOSFET, almohadillas térmicas de 9W/mK, M.2 Shield Frozr de doble cara y software Frozr AI para garantizar el máximo rendimiento con baja temperatura
- EZ DIY: EZ Link, EZ PCIe Release, EZ M.2 Shield Frozr II magnético, EZ M.2 Clip II y EZ An ...

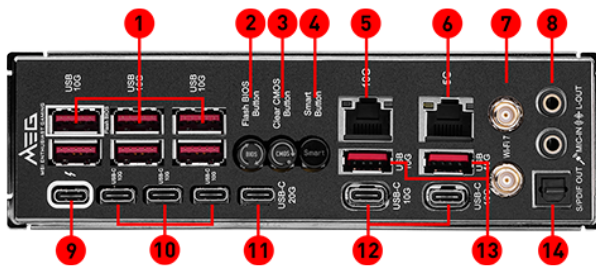

1. USB 10Gbps (Type-A)
2. Flash BIOS Button
3. Clear CMOS Button
4. Smart Button
5. 10G LAN
6. 5G LAN
7. Wi-Fi / Bluetooth
8. HD Audio Connectors
9. Thunderbolt 4 40Gbps (Type-C)
10. USB 10Gbps (Type-C)
11. USB 20Gbps (Type-C)
12. USB 10Gbps (Type-C)
13. USB 10Gbps (Type-A)
14. Optical S/PDIF-Out

SPECIFICATION

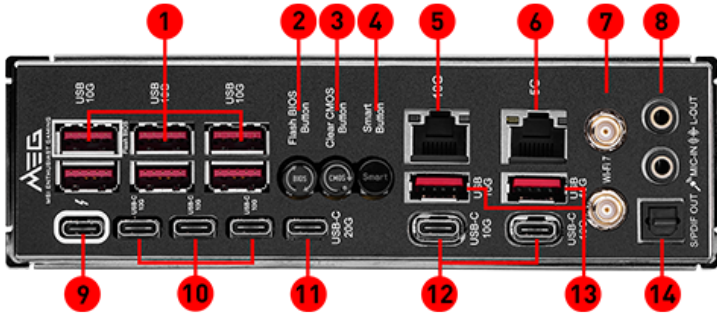Chipset	Platforma	INTEL
	Marketing Name del chipset	Z890
CPU SUPPORT	CPU Support	Supports Intel® Core™ Ultra Processors (Series 2)
	Socket	LGA 1851
Memoria	Memory Qty	4
	Tipo de memoria	DDR5 UDIMM
Onboard Graphics	HDMI™	N/A
	DVI	N/A
	D-Sub	N/A
	Onboard Graphics note	* Available only on processors featuring integrated graphics. Graphics specifications may vary depending on the CPU installed.
EXPANSION SLOT	PCI-E x16 slot (Qty)	2
	PCI-E x1 slot (Qty)	N/A
	PCI slot (Qty)	N/A
	PCI_E1 Gen	PCIe 5.0
	PCI_E1 bandwidth	x16
	PCI_E2 Gen	PCIe 5.0
	PCI_E2 bandwidth	x8
	PCI_E3 Gen	PCIe 4.0
	PCI_E3 bandwidth	x4
	PCI_E4 Gen	N/A
	PCI_E4 bandwidth	N/A
	PCI_E5 Gen	N/A
	PCI_E5 bandwidth	N/A
	PCI_E6 Gen	N/A
	PCI_E6 bandwidth	N/A
	PCI_E7 Gen	N/A
Almacenamiento	U.2 (Qty)	N/A
	M.2 (Qty)	8
	M.2_1 (Gen3/Gen4/Gen5)	PCIe 5.0 x4
	M.2_1 (SATA mode)	N/A
	M.2_2 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_2 (SATA mode)	N/A
	M.2_3 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_3 (SATA mode)	N/A
	M.2_4 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_4 (SATA mode)	N/A
	M.2_5 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_5 (SATA mode)	Yes
	M.2_6 (Gen3/Gen4/Gen5)	PCIe 5.0 x4 + PCIe 4.0 x4
	M.2_6 (SATA mode)	N/A
	M.2_7 (Gen3/Gen4/Gen5)	N/A
	M.2_7 (SATA mode)	N/A
Multi-GPU	SATA 6G (Qty)	4
	Supports NVIDIA® SLI™ Technology	N/A
LAN	AMD MULTI-GPU Support	N/A
	LAN Chip	1x Marvell® AQC113CS 10Gbps LAN 1x Intel® Killer™ E5000B 5G LAN
WIRELESS / BLUETOOTH	Módulo Wi-Fi	Intel® Killer™ BE1750x Wi-Fi 7
	Bluetooth SPEC	Supports Bluetooth® 5.4**, MLO, 4KQAM
BACK PANEL PORTS	Descripción de E/S	
		1. USB 10Gbps (Type-A) 2. Flash BIOS Button 3. Clear CMOS Button 4. Smart Button 5. 10G LAN 6. 5G LAN 7. Wi-Fi / Bluetooth 8. HD Audio Connectors 9. Thunderbolt 4 40Gbps (Type-C) 10. USB 10Gbps (Type-C) 11. USB 20Gbps (Type-C) 12. USB 10Gbps (Type-C) 13. USB 10Gbps (Type-A) 14. Optical S/PDIF-Out



PLACASBASE

MEG Z890 GODLIKE

MEG Z890 GODLIKE

PCB Dimension (W × L)	Factor de forma PCB	E-ATX
-----------------------	---------------------	-------