


SPECIFICATIONS

Graphics Processing Unit	NVIDIA® GeForce RTX™ 4060 Ti
Núcleos	4352 Units
Memória	16GB GDDR6
Recommended PSU	550W
Barramento Padrão	PCI Express® Gen 4 x 8
Interface de Memória	128-bit
Velocidade Clock Central (MHz)	Extreme Performance: 2685 MHz (MSI Center) Boost: 2670 MHz
Velocid. Clock Memória (MHz)	18 Gbps
Máximo de Monitores	4
Tecnologia G-SYNC™	Y
Saídas	DisplayPort x 3 (v1.4a) HDMI™ x 1 (Supports 4K@120Hz HDR and 8K@60Hz HDR and Variable Refresh Rate (VRR) as specified in HDMI 2.1a)
Suporte HDCP	Y
Consumo de energia (W)	165W
Resolução máx. Digital	7680 x 4320
Conectores de energia	8-pin x 1
Suporte Versão DirectX	12 Ultimate
Suporte Versão OpenGL	4.6
Dimensões(mm)	307 x 125 x 46 mm
Peso	919 g / 1636 g

CONNECTIONS

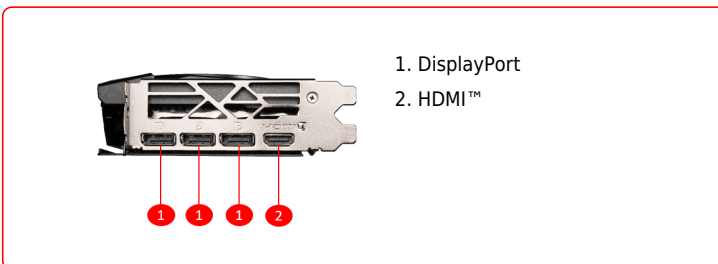

1. DisplayPort
2. HDMI™

FEATURES



TRI FROZR 3

Stay cool and quiet. MSI's TRI FROZR 3 thermal design enhances heat dissipation all around the graphics card.




TORX FAN 5.0

Fan blades linked by ring arcs and a fan cowl work together to stabilize and maintain high-pressure airflow.



Airflow Control

Sections of different heatsink fins disrupt unwanted airflow harmonics and reduce noise.



Core Pipe

Precision-machined heat pipes ensure max contact to the GPU and spread heat along the full length of the heatsink.



Metal Backplate

Thermal pads under the sturdy metal backplate provide additional cooling while the flow-through ventilation reduces trapped heat.



Zero Frozr

The fans completely stop when temperatures are relatively low, eliminating all noise.



Copper Baseplate

A solid nickel-plated copper baseplate transfers heat from the GPU to all heat pipes for better cooling.



MSI Center

The exclusive MSI Center software lets you monitor, tweak and optimize MSI products in real-time.