


### PATH TO THE FUTURE



Picture and logos

### SELLING POINTS

- Pannello QD-OLED di 3<sup>a</sup> generazione - Con qualità dell'immagine straordinaria e tempi di risposta rapidi.
- Tempo di risposta GtG ultra rapido di 0,03 ms e frequenza di aggiornamento di 280 Hz.
- QD Premium Color - Garantisce che il colore rispetti gli standard di mercato - Delta E $\leq$ 2.
- Visual HDR incredibile - VESA DisplayHDR True Black 400.
- Movimenti cristallini - Certificazione VESA ClearMR 15000.
- MSI OLED Care 2.0 - Riduce il rischio di persistenza dell'immagine / burn-in OLED.
- Garanzia Burn-In di 3 anni - Include la copertura per il burn-in OLED.

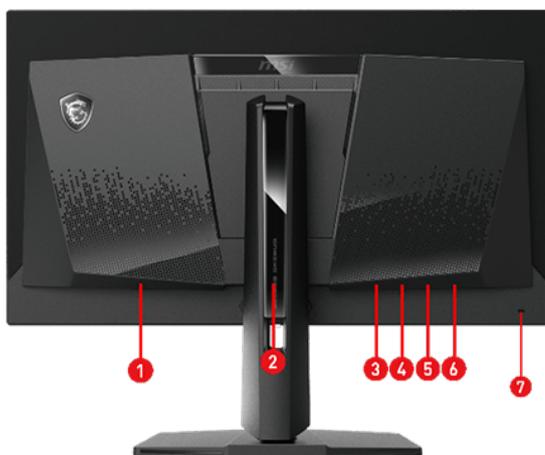

1. AC-in
2. 5-way Joystick Navigator
3. 2x HDMI™ 2.1 (WQHD@280Hz)
4. DisplayPort 1.4a (HBR3)
5. Type-C (DP alt.) w/ 15W PD
6. Headphone-out
7. Kensington lock



MONITOR

## MAG 271QP QD-OLED X28

MAG 271QP QD-OLED X28

## SPECIFICATION

Model	Entity MKT Name	MAG 271QP QD-OLED X28
	Part No	9S6-3CF19T-001
	Color	ID1/Black-Black
Display	Screen Size	26.5" (67.31 cm)
	Active Display Area (mm)	590.42(H) x 333.72(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2292(H)x0.2292(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	NVIDIA G-SYNC Compatible / AMD FreeSync™ Premium Pro
	Dynamic Refresh Rate Activated Range	48~280Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	30~460 KHz(H) / 48~280 Hz(V)
	Refresh Rate	280Hz
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120.7%/94.4%
	NTSC (CIE1931 area percentage/overlap)	104.3%/92.4%
	sRGB (CIE1976 area percentage/overlap)	138.4%/100%
	sRGB (CIE1931 area percentage/overlap)	147.6%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	118.6%/98%
	Adobe RGB (CIE1931 area percentage/overlap)	109.4%/94.9%
	DCI-P3 (CIE1976 area percentage/overlap)	110.2%/99.1%
	DCI-P3 (CIE1931 area percentage/overlap)	108.8%/98.5%
	Rec.709 (CIE1976 area percentage/overlap)	138.4%/100%
	Rec.709 (CIE1931 area percentage/overlap)	147.6%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80.3%/80.3%
	Rec.2020 (CIE1931 area percentage/overlap)	78.1%/78.1%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a (HBR3)
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	25 (SDR) 40 (HDR)
	Annual Energy Consumption (KWh)	44
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F (SDR) G (HDR)
Power Cord Type	C13	

In The Box	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	609 x 242 x 416
	Product Dimension without Stand (WxDxH) (mm)	609 x 72 x 362
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	8.2
	Weight Without Stand (kg)	5.5
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	82 x 16.9 x 51.3
	Outer Carton Dimension (WxDxH) (cm)	83.5 x 18.4 x 53.6
	Weight (Gross kg)	10.9
Barcode Info	EAN	4711377311304